

Geotextile fabric liner is a synthetic geotextile mat that can be used to line excavated runoff ditches. The material mesh size allows water to pass, but will prevent vegetation from growing up through the matting and reducing flow capacity. It is u.v. stabilized and can be covered with a layer of large gravel/rubble. Material is installed by rolling out over the excavated ditch, tamping down, and securing using anchor pins. The material selected for this application is designed to be used in waterways and will withstand the expected shear stresses.

Geotextile erosion control material is made from polymers and is u.v. stabilized. This material is used to cover steep exposed slopes, or slopes where vegetation is expected to be sparse. The material aids in reducing surface erosion by providing a permanent ground cover that will protect soil surface from rain drop displacement, increase surface shear stress resistance, and thus reduce kinetic energy along ground surface. The material is applied by anchoring into an excavated trench at the top of the slope and rolling the fabric down slope and anchoring it to the ground using soil staples. The slope to be treated will be prepped prior to application to insure that the fabric is in direct contact with the ground surface. This material has mesh size that allows grasses and other herbaceous plants to grow up through the mat without tearing the fabric.

Grassed swales are shallow grass-covered hydraulic conveyance channels that help to slow runoff and facilitate infiltration. The suitability of grassed swales depends on land use, soil type, slope, imperviousness of the contributing watershed, and dimensions and slope of the grassed swale system. In general, grassed swales can be used to manage runoff from drainage areas that are less than 4 hectares (10 acres) in size, with slopes no greater than 5 percent. Use of natural, low-lying areas is encouraged and natural drainage courses should be preserved and utilized.

Green roofs consist of an impermeable roof membrane overlaid with a lightweight planting mix with a high infiltration rate and vegetated with plants tolerant of heat, drought, and periodic inundations. In addition to reducing runoff volume and frequency and improving runoff water quality, a green roof can reduce the effects of atmospheric pollution, reduce energy costs, and create an attractive environment. They have reduced replacement and maintenance costs and longer life cycles compared to traditional roofs.

Infiltration Trenches are trenches that have been back-filled with stone. These trenches collect runoff during a storm event and release it into the soil by infiltration. Infiltration trenches may be used in conjunction with another storm water management device, such as a grassed swale, to provide both water quality control and peak flow attenuation. Runoff that contains high levels of sediments or hydrocarbons (i.e. oil and grease) that may clog the trench is often pretreated with other devices such as grit chambers, water quality inlets, sediment traps, swales, and vegetated filter strips.

Native grasses can be contained in hydromulch mixture and applied to targeted areas. The grasses should be selected based on the species' ability to propagate in the site's physiographic conditions, to provide surface cover of soils, increase tensional strength of soils and not require maintenance past the grow in period. A hydro-seed unit will be used to hydraulically disperse grass seed. The mixture will include a geo-binding agent to aid in mixture stickiness, soil amendments, mulch, and grass (seed and/or stolons).

Permanent seeding is used to establish vegetative grass cover that will prevent soil detachment by raindrop impact, reduce sheet and rill erosion, and stabilize slopes and channels. Permanent seeding can be used in conjunction with erosion control blankets and mats to provide both temporary and permanent erosion control. Perennial grasses, when used with turf reinforcement mats, provide the fibrous root network that anchors the channel linings. These treatments can greatly increase the maximum permissible velocities and are very useful in stabilizing channels and grass-lined channels.

Porous (Permeable) pavement is an alternative to asphalt or concrete surfaces that allows storm water to drain through the porous surface to a stone reservoir underneath. The reservoir temporarily stores surface runoff before infiltrating it into the subsoil. The appearance of the alternative surface is often similar to asphalt or concrete, but it is manufactured without fine materials and instead incorporates void spaces that allow for storage and infiltration. Underdrains may also be used below the stone reservoir if soil conditions are not conducive to complete infiltration of runoff.

Rain barrels and cisterns harvest rainwater for reuse. Rain barrels are placed outside a building at roof downspouts to store rooftop runoff for later reuse in lawn and garden watering. Cisterns store rainwater in significantly larger volumes in manufactured tanks or underground storage areas. Rainwater collected in cisterns may also be used in non-potable water applications such as toilet flushing. Both cisterns and rain barrels can be implemented without the use of pumping devices by relying on gravity flow instead. Rain barrels and cisterns are low-cost water conservation devices that reduce runoff volume and, for very small storm events, delay and reduce the peak runoff flow rates. Both rain barrels and cisterns can provide a source of chemically untreated “soft water” for gardens and compost, free of most sediment and dissolved salts.

Vegetative filter strip. A vegetated section of land designed to accept runoff as overload sheet flow from upstream development. It may adopt any natural vegetated form, from grass meadow to small forest. The dense vegetative cover facilitates pollutant removal. A filter strip cannot treat high velocity flows and is generally recommended for use in agriculture and low density development. A vegetated filter strip differs from a natural buffer in that the strip is not natural; rather, it is designed and constructed specifically for the purpose of pollutant removal. A filter strip can also be an enhanced natural buffer, however, whereby the removal capability of the natural buffer is improved through engineering and maintenance activities such as land grading or the installation of a level spreader. A filter strip differs from a grassed swale in that a swale is a concave vegetated conveyance system, whereas a filter strip has a fairly level surface.

Design Considerations

The proper selection and successful design of structural practices for storm water quality enhancement is the first priority of storm water management. The cost effectiveness of each control has to be considered and measured against the actual environmental benefits realized. Design objectives can be stated as in terms of technology (i.e. by specifying a particular control device) or in terms of quantitative effect (i.e. by specifying a required degree of control or a maximum allowable effect). The addition of water quality considerations in the design of management practices has created a shift from capturing peak flows during flood events to a continuous long-term rainfall-runoff design volume approach and the pollutant loads associated with these volumes. To treat the bulk of the pollutant loads from storm water runoff, a treatment volume that is designed to capture the initial component of the storm water runoff is essential.

The general design for implementing many management practices will need to take into consideration proper site suitability, drainage area, land availability, construction material selection, and maintenance requirements. Specific features will need to be considered for each management practice, some of which are listed in Table 1. This table presents general key considerations for each management practice. Each structure will require an engineering design prior to installation to insure the design is feasible for the site conditions. Feasibility of designs requires detailed analysis through an engineering process that takes into consideration all physical aspects of implementation, such as hydrology and geography.

Table 1. Design Considerations for Recommended Management Practices

Management Practice	Sizing Considerations	Design Considerations
Baffle box	<ul style="list-style-type: none"> Sizing of unit function of design hydrology and sediment sizes of influent. 	<ul style="list-style-type: none"> Located within 15 ft. of paved surface to allow access for maintenance
Coir logs	<ul style="list-style-type: none"> Site specific 	<ul style="list-style-type: none"> Securing method Revegetation Types of plant Anchoring device selection Additional stabilization and protection works (other than coir logs)
Curb inlet baskets	<ul style="list-style-type: none"> Sediment volume 	<ul style="list-style-type: none"> Hooded outlet Filtering variety Maintenance frequency
Extended detention basin	<ul style="list-style-type: none"> Drainage area Slope Soils/Topography Groundwater 	<ul style="list-style-type: none"> For both water quality and storm water attenuation Pretreatment/Treatment Filter fine terrigenous sediment Conveyance Maintenance Reduction Landscaping
Good housekeeping practices	N/A	N/A
Grass swale	<ul style="list-style-type: none"> Drainage area Slope Soils/Topography Groundwater 	<ul style="list-style-type: none"> A parabolic or trapezoidal cross-section with side slopes no steeper than 1:3 Most effective when used in conjunction with other practices, such as wet ponds, infiltration strips, wetlands, etc. Both the top and toe of the slope should be as flat as possible to encourage sheet flow and prevent erosion

Management Practice	Sizing Considerations	Design Considerations
Green roof – Green grid	<ul style="list-style-type: none"> • Site specific • Maximum weight load 	<ul style="list-style-type: none"> • Types of plants • Maintenance requirements • Disability access • Liability Issues • Architectural accents
Infiltration trench	<ul style="list-style-type: none"> • Drainage area • Slope • Soils/Topography • Groundwater 	<ul style="list-style-type: none"> • Native soils are excavated and replaced with an improved soil mixture column • Can be used in extremely narrow spaces • Conveyance • Maintenance Reduction • Landscaping
Invasive species control	<ul style="list-style-type: none"> • Site specific 	<ul style="list-style-type: none"> • Types of plants • Time scale • Equipment needed • Maintenance requirements
Modular wetland	<ul style="list-style-type: none"> • Drainage area 	<ul style="list-style-type: none"> • Type of plants • First flush • Conveyance • Maintenance Reduction • Landscaping
Natural/Native vegetation	<ul style="list-style-type: none"> • Site specific 	<ul style="list-style-type: none"> • Types of plants • Maintenance
Porous pavement	<ul style="list-style-type: none"> • Used in a wide variety of land use settings • Overflow parking areas or other areas such as fire lanes with low traffic loads • Load bearing • Slope/Topography 	<ul style="list-style-type: none"> • Native soils on the site should be conducive to infiltration, with an infiltration rate at least 0.3 inches/hour • Not to be used in areas with a slope > 15% • Seasonal high water table should be at least 3 feet below grade
Rain barrels	<ul style="list-style-type: none"> • Roof • Water demand • Rainfall Pattern • Capacity • Overflow Device 	<ul style="list-style-type: none"> • Modify downspout to barrel inflow site • Screened inflow design • Outflow hose/barrel connection • Keep hose above barrel rim
Retention pond	<ul style="list-style-type: none"> • Drainage area • Slope • Soils/Topography • Groundwater 	<ul style="list-style-type: none"> • Pretreatment/Treatment • Filter fine terrigenous sediment • Conveyance • Maintenance Reduction • Landscaping
Subsurface storage	<ul style="list-style-type: none"> • Drainage area • Groundwater level • Available land 	<ul style="list-style-type: none"> • Many types of material including galvanized metal, reinforced concrete or synthetic compounds or any pre-manufactured containers adaptable to ground contact • Conveyance
Turf reinforcement mats	<ul style="list-style-type: none"> • Site specific 	<ul style="list-style-type: none"> • Site preparation • Anchoring device selection • Soil type • Maintenance

Design Features

1. Baffle Box
2. Coir Log
3. Curb Inlet Basket
4. Extended-Detention Pond
5. Grass Swale
6. Green Roof – Green Grid
7. Infiltration Trench
8. Modular Wetland
9. Rain Barrel
10. Retention Pond
11. Subsurface Storage
12. Turf Reinforcement Mats

Design Feature 1. Baffle Box

The Nutrient Separating Baffle Box is a multi chambered concrete box separated with baffles used to settle out pollutants. Chambers can be fitted with absorbent membranes to trap floating pollutants, e.g. hydrocarbons. Effective at removing sediments, TSS, and hydrocarbons; this system is specially designed to capture trash and debris, organics, and gross solids in a raised screening basket which allows these pollutants to be stored in a dry state.

http://www.biocleanenvironmental.com/product/ns_baffle_box

Nutrient Separating Baffle Box

A Superior Stormwater Treatment System Separated from the Rest.

The Nutrient Separating Baffle Box (NSBB) is a widely accepted and desired stormwater solution chosen by civil engineers, municipalities and developers nationwide because of its superior characteristics. The NSBB is easy to install and maintain and is the only systems with a two stage maintenance option, which minimizes maintenance costs.

Hundreds of Nutrient Separating Baffle Boxes have been installed nation wide, from Florida to California because of its superior and proven design. The NSBB efficiently removes TSS, hydrocarbons, nutrients, metals and debris/organics from stormwater runoff. The patented filtration screen system captures and stores trash and organics in a dry state, which prevents nutrient leaching and bacterial build up.

System Characteristics

Traps Oil & Grease

The skimmer and hydrocarbon booms captures all forms of hydrocarbons.

High TSS Removal

The three chambered design maximizes capture of large and fine TSS.

89.8% TSS Removal

Pandit - 1996

86.3% TSS Removal


Harvey's Lake - 2004

93.3% TSS Removal

Dillard - 2006

Low Installation Cost

Bottom of structure less than 4 feet from invert of pipe.

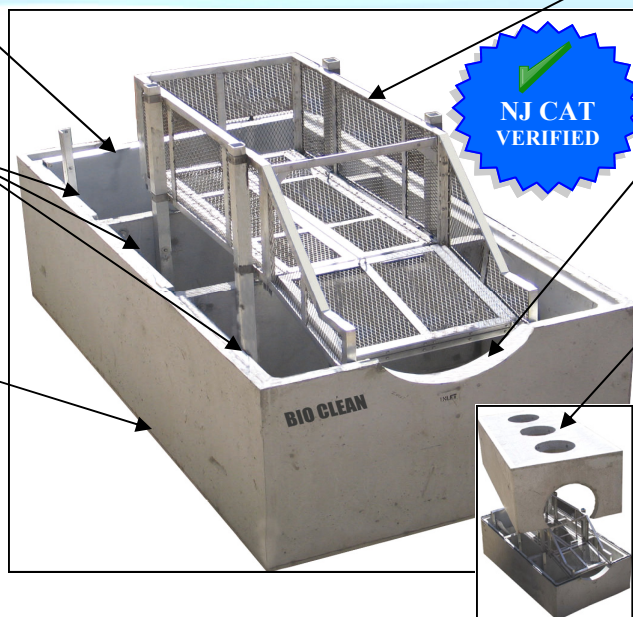

Separates Nutrients & Trash

The patented filtration screen system captures and stores trash and organics in a dry state which prevents nutrient

Low Head Loss

Allows for easy retrofit and inline installation. Eliminates the need for expensive diversion structures.

Easy Maintenance

Unobstructed Manhole Access

POLLUTANT	REMOVAL EFFICIENCY
Trash & Debris	99% ¹
TSS	76.9% ² to 93.3% ³
Fine TSS ($d_{50} \ 63 \ \mu\text{m}$)	67.3% ⁴
Metals	Up to 57% ⁵
Total Nitrogen	38% to 63% ⁵
Total Phosphorus	18% to 70% ^{2,5}

1. Rockledge Baffle Box Independent Field Report. Applied Environmental Technology. 2007.
2. Brevard County (Mico & Indalantic). St. Johns River Water Management District. 1994.
3. Field Test for Suntree Nutrient Separating Baffle Box. Dillard & Associates. 2005.
4. New Jersey Corporation for Advanced Technology. 2008.
5. Atlantic Beach Field Report. Blue Water Environmental. 2004.

Setting a New Standard for Hydrodynamic Separators.

The Nutrient Separating Baffle Box is designed to do more than most systems. This system is effective at removing not only TSS, but also fine TSS and gross solids making it, overall, a more effective treatment system compared to traditional swirl type separators. This system has been proven to provide the following benefits:

System Benefits


- **Can Treat 100% of the Flow.**
Offline Configuration is Not Required.
- **Inexpensive Maintenance.**
Patented screen system allows gross solids to be removed without vacuuming out the water.
- **Minimal Head Loss.**
Hydraulically efficient design generates less head loss than diversion structures.
- **Custom Designs Available.**
Can be modified to meet your needs.
- **Easy to Install.**
Delivered in a top & bottom half to minimize weight. Shallow profile minimizes installation costs.
- **5 Year Warranty.**
Made of precast concrete, fiberglass, aluminum & stainless steel. No cheap plastics!

Functional Description

Captures:

- Trash & Debris ^D
- Oxygen Demanding Substances/Organic Compounds ^D
- Hydrocarbons, Oils & Grease
- TSS (including fines)
- Nutrients (particulates)
- Heavy Metals (particulates)

"Pollutants with this symbol ^D are stored in a dry state".

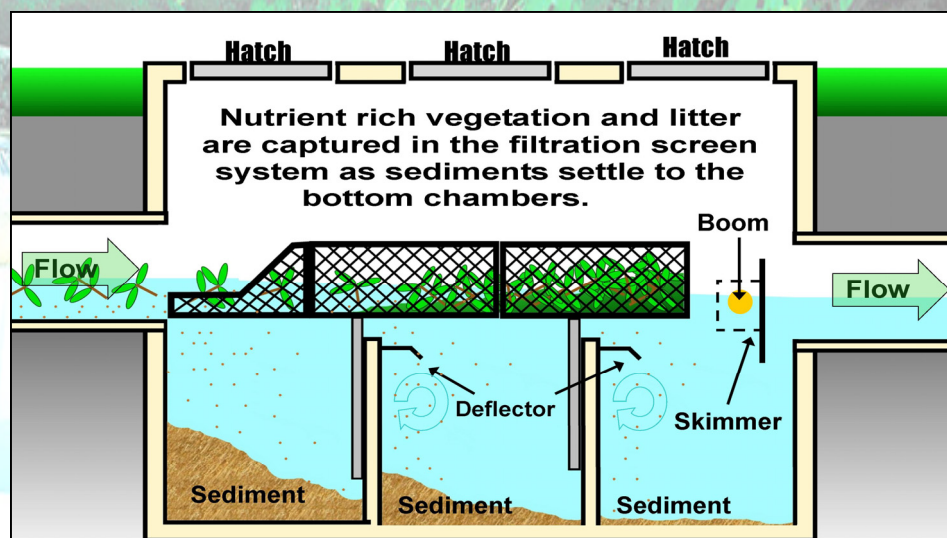

The Filtration Screen System is Patented

During Storm Event

Why Dry State Storage? ^D

Storing Trash, Debris, Organics, and Oxygen Demanding Substances in a Dry State Prevents:

- Prevent Nutrient Leaching
- Eliminate Septic Conditions
- Minimize Bacteria Growth
- Eliminate Bad Odors

Nutrient Separating Baffle Box




Standing Water is Clear & No Bacteria Growth Visible.

Other Systems



Standing Water is Not Clear & Bacteria Growth Visible.

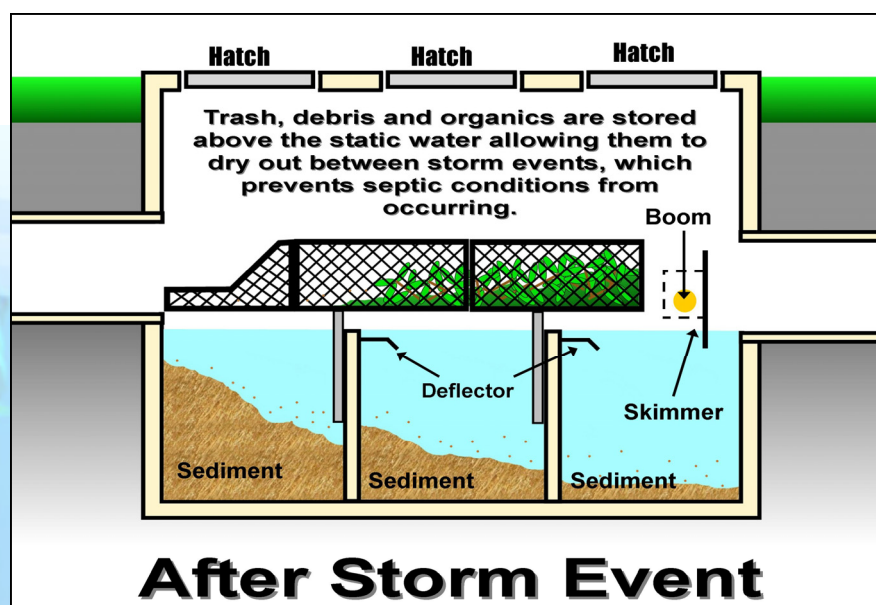

After Storm Event

Operation:

Skimmer & Boom

Collects hydrocarbons & controls flow velocity which improves removal efficiency.

Deflectors

Prevents re-suspension of captured pollutants at higher flows by directing water currents above sediment chambers.

Filtration Screen System

Collects and stores trash, debris, organics, and oxygen demanding substances in a dry state above the standing water. As mentioned above this has many performance benefits along with simplifying maintenance.

Multiple Sediment Chambers

Maximizes TSS removal and eliminates scouring during extreme flow rates.

Design Feature 2. Coir Log



Sediment STOP™

BIODEGRADABLE Filtration System

The SedimentSTOP™ (Patent Pending) shall be a machine-produced 100% biodegradable sediment filtration system.

The SedimentSTOP™ shall be composed of 70% agricultural straw and 30% coconut fiber matrix evenly distributed over the entire area of the bottom netting. The SedimentSTOP™ shall consist of a bottom netting and a 2 ft. (0.61 m) top netting that covers the matrix material on the “splash apron” of the SedimentSTOP™ system. The netting shall be constructed from 100% biodegradable woven natural organic fiber netting. The netting shall consist of machine directional strands formed from two intertwined yarns with cross directional strands interwoven through the twisted machine strands (commonly referred to as a Leno weave) to form an approximate 0.50 x 1.00 inch (1.27 x 2.54 cm) mesh. The blanket shall be sewn together on 1.50 inch (3.81 cm) centers (50 stitches per roll width) with biodegradable thread.

Each SedimentSTOP™ shall yield a structure 50 lineal feet (15.2 m) in length, with an approximate finished diameter of 9 inches (0.23 m). The diameter of the finished structure may be increased to meet individual project specifications by spreading loose straw, pine needles, wood chips, grass cuttings, etc. across the width of the SedimentSTOP™ before rolling edge to edge.

The SedimentSTOP™ shall be manufactured by North American Green, or equivalent. The SedimentSTOP™ shall have the following properties:


Material Content

Matrix	70% Straw Fiber
	1.225 lbs/yd ² (0.665 kg/m ²)
	30% Coconut Fiber
	0.525 lbs/yd ² (0.285 kg/m ²)
Netting	Bottom side, Leno woven 100% biodegradable natural organic fiber (9.30 lbs/1,000 ft ² [4.50 kg/100 m ²] approximate weight)
	Top side, 2 ft. (0.61 m) strip covering the “splash apron” of the SedimentSTOP™, Leno woven 100% biodegradable natural organic fiber (9.30 lbs/1,000 ft ² [4.50 kg/100 m ²] approximate weight)
Thread	Biodegradable

Physical Specifications

	<u>English</u>	<u>Metric</u>
Width	6.67 ft	2.03 m
Length	50.00 ft	15.24 m
Weight	65.00 lbs ± 10%	29.50 kg ± 10%
Stitch Spacing	1.50 inches	3.81 cm
Finished Structure Diameter - Approximately 9.00 in (0.23 m)		

SEDIMENTSTOP INSTALLATION

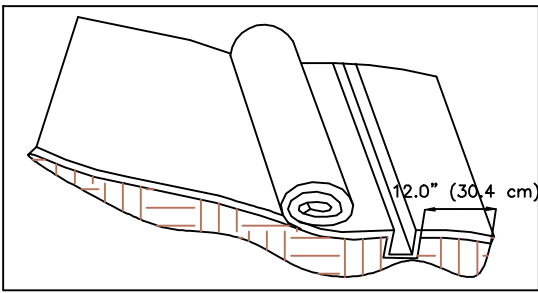

④



NORTH
AMERICAN
GREEN

④a



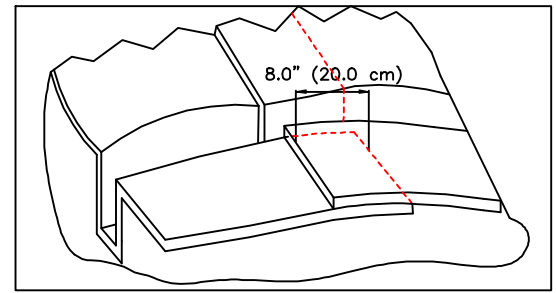



DIAGRAM A

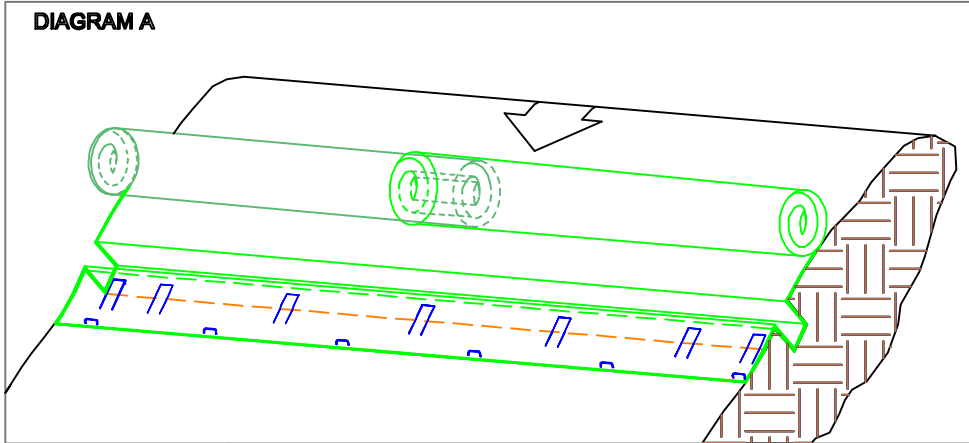

③



①

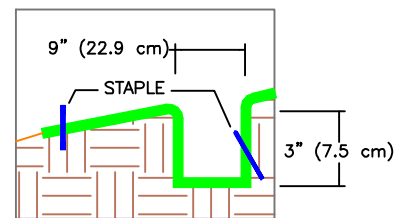

⑦


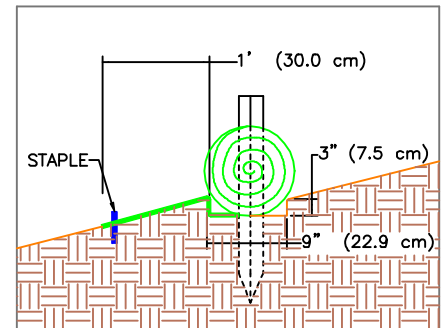


DIAGRAM B



1. BEGIN AT THE LOCATION WHERE THE SEDIMENTSTOP (Patent Pending) IS TO BE INSTALLED BY EXCAVATING A 3" (7.5 CM) DEEP X 9" (22.9 CM) WIDE TRENCH ALONG THE CONTOUR OF THE SLOPE. EXCAVATED SOIL SHOULD BE PLACED UP-SLOPE FROM THE ANCHOR TRENCH.
2. UNROLL THE SEDIMENTSTOP SO THE SECTION WITH THE 2' WIDE TOP NETTING IS THE DOWN SLOPE END (SPLASH APRON). THE SPLASH APRON OF THE SEDIMENTSTOP SHOULD COVER THE ANCHOR TRENCH ENSURING THAT APPROXIMATELY 12" (30 CM) IS EXTENDED BEYOND THE LOWER EDGE OF THE ANCHOR TRENCH. NOTE: SEEDING MUST BE CONDUCTED PRIOR TO INSTALLATION OF THE SEDIMENTSTOP.
3. SECURE THE SEDIMENTSTOP IN THE ANCHOR TRENCH BY PLACING A ROW OF STAPLES/STAKES ON 12" (30 CM) CENTERS ACROSS THE ENTIRE LENGTH OF THE SEDIMENTSTOP. A SECOND ROW OF STAPLES/STAKES MUST BE PLACED ACROSS THE ENTIRE LOWER EDGE OF THE SEDIMENTSTOP SPLASH APRON ON APPROXIMATELY 12" (30 CM) CENTERS, STAGGERED WITH THE FIRST ROW OF STAPLES/STAKES.
4. BEGIN ROLLING THE SEDIMENTSTOP FROM ITS UPPER EDGE (UP-SLOPE EDGE) INTO A CONSISTENT ROLL DIAMETER UNTIL THE ROLL IS LOCATED IN THE ANCHOR TRENCH. IF A LARGER DIAMETER STRUCTURE IS DESIRED, PLACE ADDITIONAL ORGANIC MATERIAL (I.E. STRAW, LEAVES, PINE NEEDLES OR LAWN CLIPPINGS) ACROSS THE ENTIRE WIDTH OF THE SEDIMENTSTOP PRIOR TO ROLLING. SEE DIAGRAM 4a FOR SEAMING OF ADJACENT SEDIMENTSTOP ROLLS.
5. STOP ROLLING THE SEDIMENTSTOP WHEN THE ROLL IS LOCATED IN THE ANCHOR TRENCH.
6. SECURE THE SEDIMENTSTOP STRUCTURE TO THE SLOPE SURFACE BY DRIVING APPROXIMATELY 18" - 24" (45-60 CM) STAKES THROUGH THE CENTER OF THE ROLL EVERY 3' (0.9 M) ON CENTER. IF TWO SEDIMENTSTOP STRUCTURES ARE SEAMED TOGETHER ENSURE A STAKE IS DRIVEN THROUGH THE SEAM. THE FINAL STRUCTURE'S DIAMETER WILL DICTATE STAKE LENGTH. LEAVE A SUFFICIENT AMOUNT OF STAKE EXPOSED ABOVE THE SEDIMENTSTOP TO ENSURE THE STRUCTURE IS NOT COMPRESSED. BOTH LONGITUDINAL ENDS SHOULD BE ANGLED UP SLOPE.
7. BACKFILL AND COMPACT SOIL INTO THE UP-SLOPE PORTION OF THE ANCHOR TRENCH. SMOOTH AND LEVEL ANY SOIL REMAINING ABOVE THE SEDIMENTSTOP NOT USED TO FILL THE ANCHOR TRENCH. PLACE SEED ALONG UP-SLOPE PORTION OF SEDIMENTSTOP IF REQUIRED.

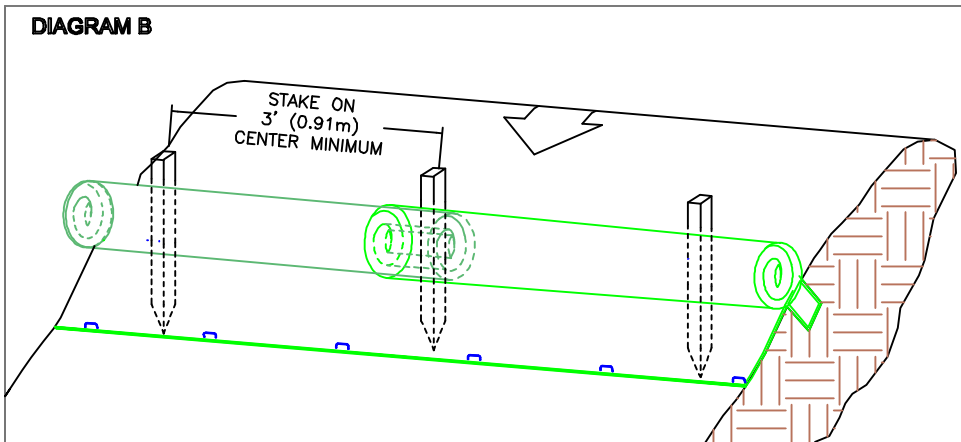


Sediment **STOP**TM

BIODEGRADABLE Filtration System

APPLICATION GUIDELINES

North American Green SedimentSTOPTM is a 100% biodegradable best management practice (BMP) that offers an effective and economical alternative to silt fence, straw bales, and wattles for sediment control and storm water runoff. The SedimentSTOP's combination of straw/coconut fibers and leno woven jute netting has been proven in university and field research to afford exceptional sediment control by slowing and filtering runoff and trapping sediment. The research showed that properly installed, the SedimentSTOP structure reduced initial sediment migration by up to 98% compared to unprotected control plots.

The following guidelines are provided to assist in design, installation, and structure spacing. These guidelines may require modification due to variation in soil type, rainfall intensity or duration, and amount of runoff affecting the application site. SedimentSTOP should be installed perpendicular to the primary direction of overland flow.

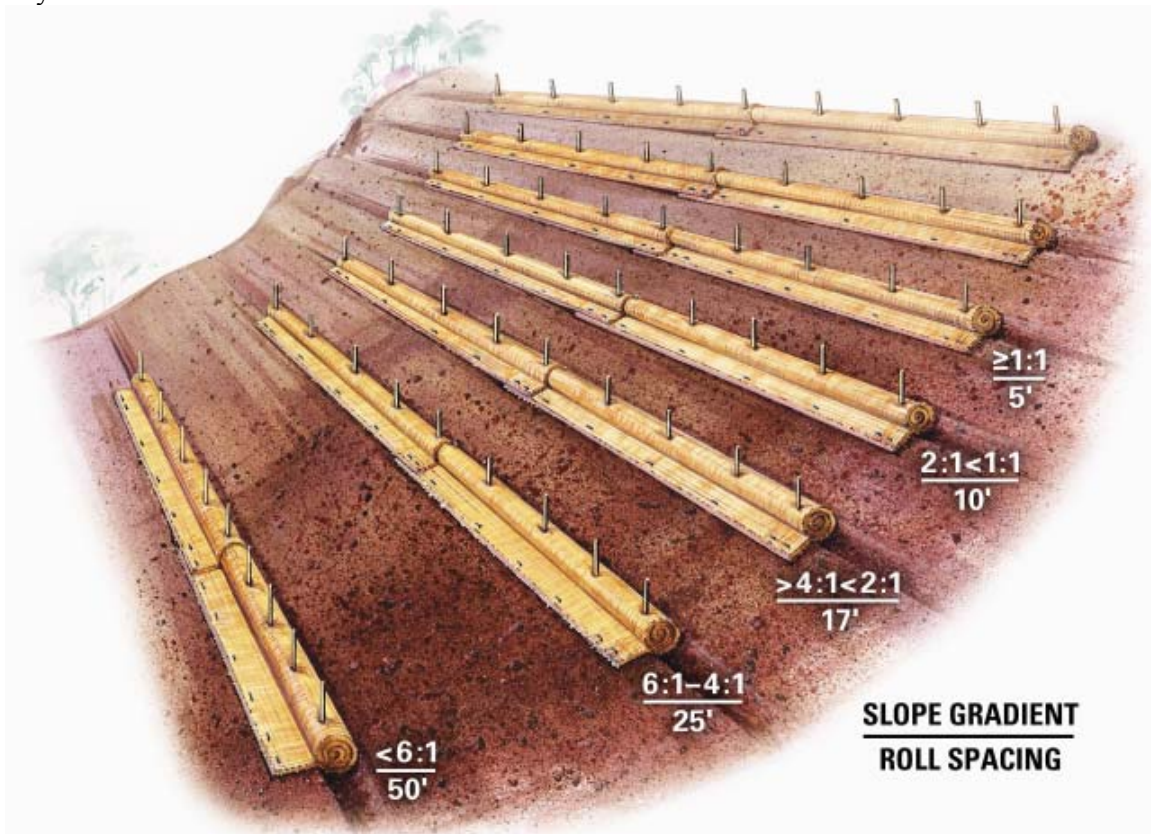

To maximize sediment containment with the SedimentSTOP place the initial structure at the top/crest of the slope if significant runoff is expected from above. If no runoff from above is expected, the initial SedimentSTOP can be installed at the appropriate distance downhill from the top/crest of the slope. The final structure should be installed at or just beyond the bottom/toe of the slope.

The SedimentSTOP is a temporary sediment control device and is not intended to replace erosion control blankets or turf reinforcement mats. If vegetation is desired for permanent erosion control, North American Green recommends that rolled erosion control products be used to provide effective immediate erosion control until vegetation is established. The SedimentSTOP may be used in conjunction with blankets and mats as supplemental sediment and runoff control for these applications. Like all sediment control devices, the effectiveness of SedimentSTOP is dependent on storage capacity.

Design Feature 3. Curb Inlet Basket



The Curb Inlet Basket is the only filter available with the patented 'Easy Maintenance Shelf System', positioning the basket directly under the manhole for easy maintenance. This shelf has been tested and continues to be used in Hawai'i with positive results and feedback.

CURB INLET BASKET

w/ **Easy Maintenance Shelf System**

**Extreme Durability—
Constructed from:**

- **Heavy Duty UV Protected Marine Grade Fiberglass**
- **High Grade Stainless Steel Hardware and Screens**

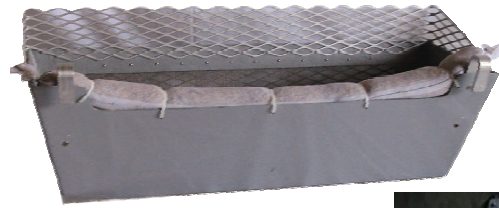

“Highest Rated Catch Basin Insert”

(The Efficiency of Storm Drain Filters in Removing Pollutants from Urban Road Runoff Report, University of Hawaii, Dept of Oceanography, Honolulu, Hawaii, 2005).

5 Year Unlimited Warranty on Construction

**Ask Our Competition if They Have a Warranty
Like This. Then Give us a Call.**



The Easiest Filter to Clean and Install

- Maintenance and Cleaning Crews Throughout Southern California Appreciate the User Friendly Design of Our Filters.



BIO CLEAN
ENVIRONMENTAL SERVICES. INC. 

“The Stormwater Standard”

P O Box 869, Oceanside, CA 92049
(760) 433-7640 • Fax (760) 433-3176
www.biocleanenvironmental.net



BIO CLEAN 
ENVIRONMENTAL SERVICES, INC.™



“The Stormwater Standard”



Case Study of Curb Inlet Filters

Prepared for The City and County of Honolulu, Hawaii

AbTech System Servicing Box-Score

	Poor		Fair		Excellent
	1	2	3	4	5
Ease of Attachment/Reattachment to Drain					✓
Ease of Handling and Entry Through Manhole			✓		
Ease of Cleaning and Filter-Media Replacement			✓		
Prevention of Debris Loss During Removal From Drain			✓		
Overall Maintenance Turn-Around Time				✓	

Total Score = 18

KriStar System Servicing Box-Score

	Poor		Fair		Excellent
	1	2	3	4	5
Ease of Attachment/Reattachment to Drain			✓		
Ease of Handling and Entry Through Manhole					✓
Ease of Cleaning and Filter-Media Replacement		✓			
Prevention of Debris Loss During Removal From Drain			✓		
Overall Maintenance Turn-Around Time		✓			

Total Score = 15

Hydrocompliance Servicing Box-Score

	Poor		Fair		Excellent
	1	2	3	4	5
Ease of Attachment/Reattachment to Drain	✓				
Ease of Handling and Entry Through Manhole	✓				
Ease of Cleaning and Filter-Media Replacement				✓	
Prevention of Debris Loss During Removal From Drain		✓			
Overall Maintenance Turn-Around Time	✓				

Total Score = 9

BioClean System Servicing Box-Score

	Poor		Fair		Excellent
	1	2	3	4	5
Ease of Attachment/Reattachment to Drain				✓	
Ease of Handling and Entry Through Manhole					✓
Ease of Cleaning and Filter-Media Replacement				✓	
Prevention of Debris Loss During Removal From Drain				✓	
Overall Maintenance Turn-Around Time					✓

Total Score = 22 **Highest Score**

Performance matrix for field tested DII systems				
Parameter	AbTech	Hydrocompliance	KriStar	Bioclean
Initial device cost (10 ft drain inlet)	10	5	15	20
Initial installation requirements	10	2.5	7.5	5
Flow capacity	5	10	2.5	7.5
Turbidity during short term test	5	10	7.5	2.5
Short term RDS retention	10	5	7.5	2.5
Short term organics retention	10	2.5	7.5	5
Long term RDS retention	2.5	10	7.5	5
Long term PAH retention (mg)	5	10	7.5	5
Long term O/G retained (mg)	10	5	2.5	7.5
Long term overall rubbish retention	5	5	10	10
Suitability for Vector Control	5	2.5	7.5	10
Unit durability	7.5	2.5	7.5	10
Media replacement Costs	5	10	15	20
Suitability for Type B basin	2.5	2.5	7.5	10
Servicing Requirements	18	9	15	22
TOTAL SCORE	110.5	91.5	127.5	142

Performance of DII is ranked from one to four, with increasing scores assigned to increasing performance of the device. Ranks for each category are scaled to 10 except initial costs and media replacement costs which are scaled to 20. Servicing requirements are based on a score of 25 as determined in Appendix A. Maximum total possible score is 185.

Table 17: DII Servicing Time Table

Highest Score

Site	DII System	Required Servicing Time (hours)
15	Hydrocompliance	1.75 105 Minutes
17	KriStar	1.0 60 Minutes
18	AbTech	0.5 30 Minutes
19	Bioclean	0.25 15 Minutes


Prepared by
 Eric Heinen DeCarlo, Ph.D.
 Yvonne-Katrin Parry
 Robert J. Morgenweck
 Department of Oceanography
 1000 Pope Road
 University of Hawaii
 Honolulu, Hawaii 96822
 In consultation with
 Limtiaco Consulting Group Inc.
 615 Piikoi Street, #1605
 Honolulu, Hawaii 96814

See Full Report at:

<http://www.biocleanenvironmental.net/stormdrain/products/reports/reports.htm>


Design Feature 4. Extended-Detention Pond¹

Schematic of a Dry Extended-Detention Pond (MDE 2000)

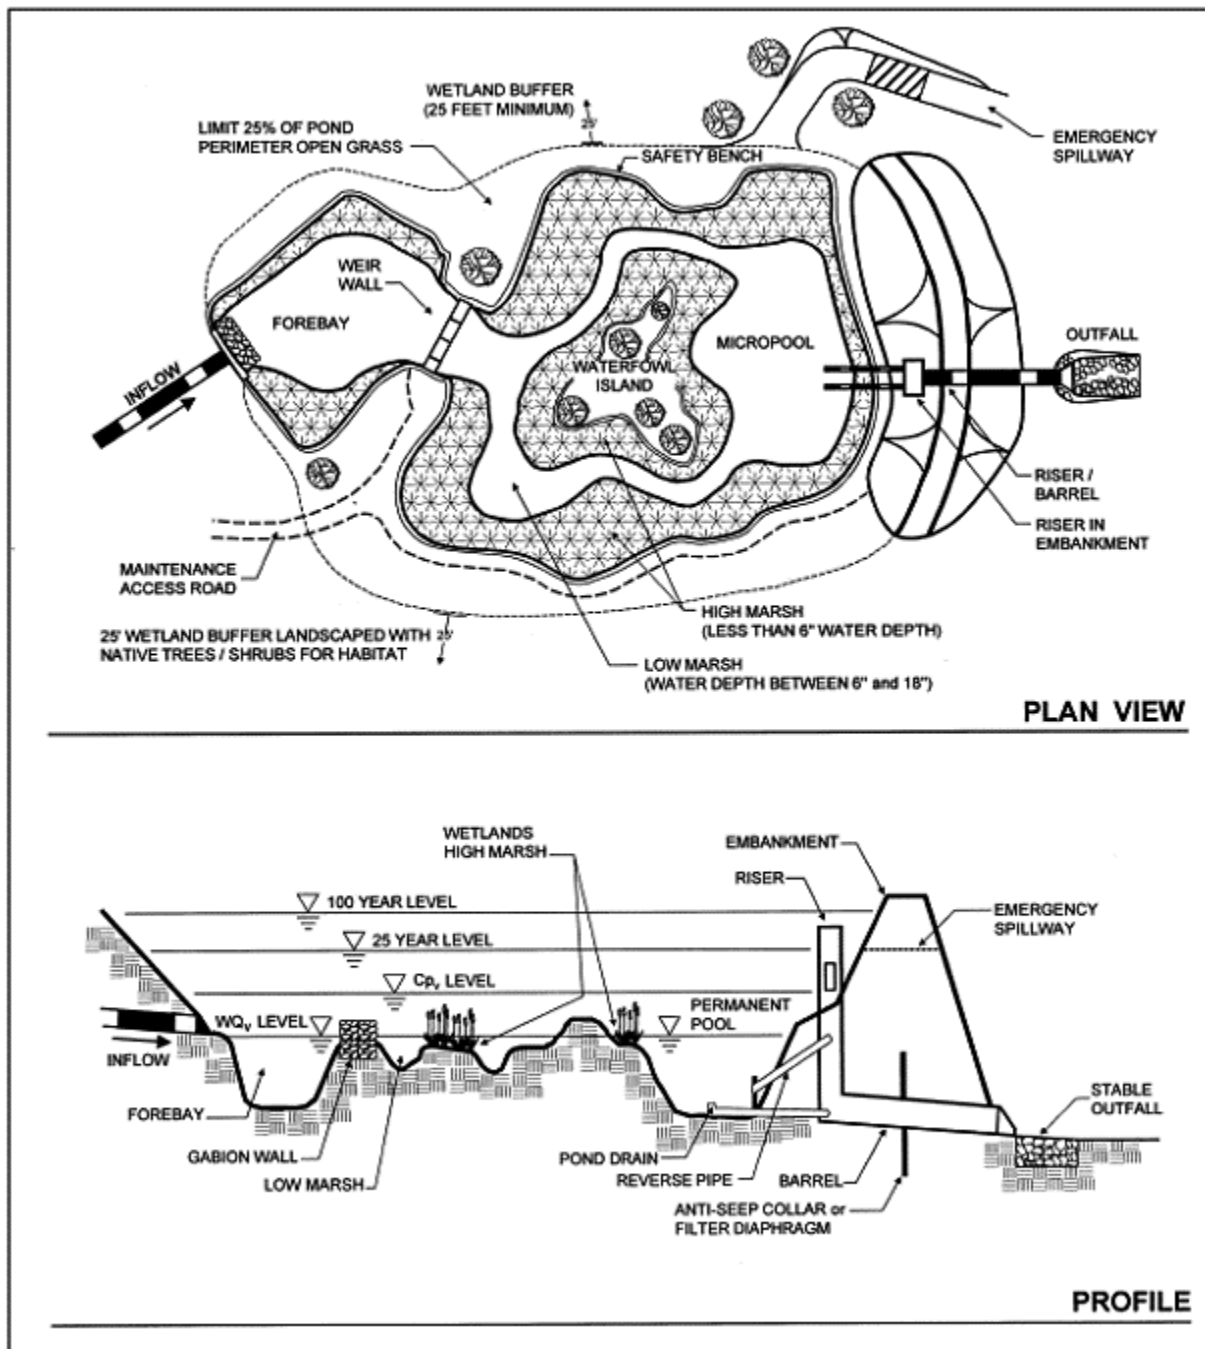


¹ Image depicts general design.

Example Detention Pond Design (Liebl 2006)

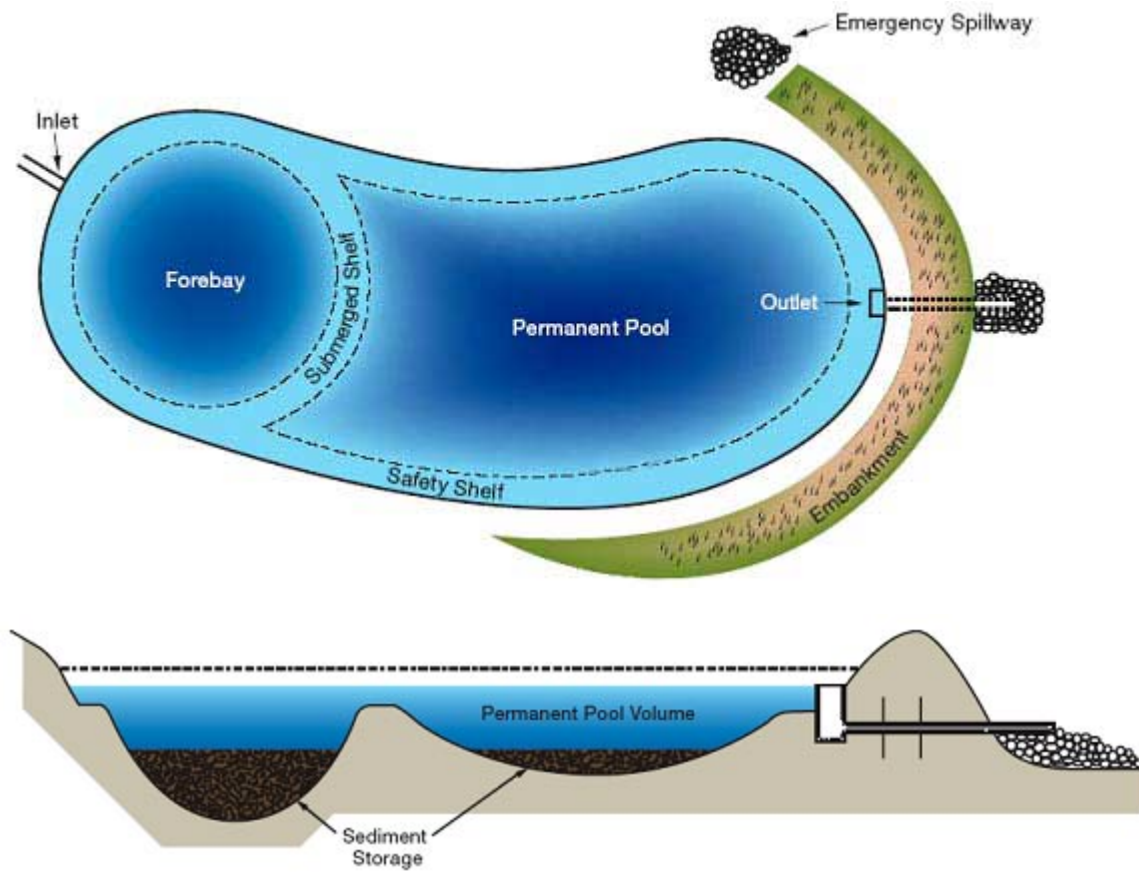

Design Feature 5. Grass Swale

Figure used with permission of Salix Applied Earthcare.

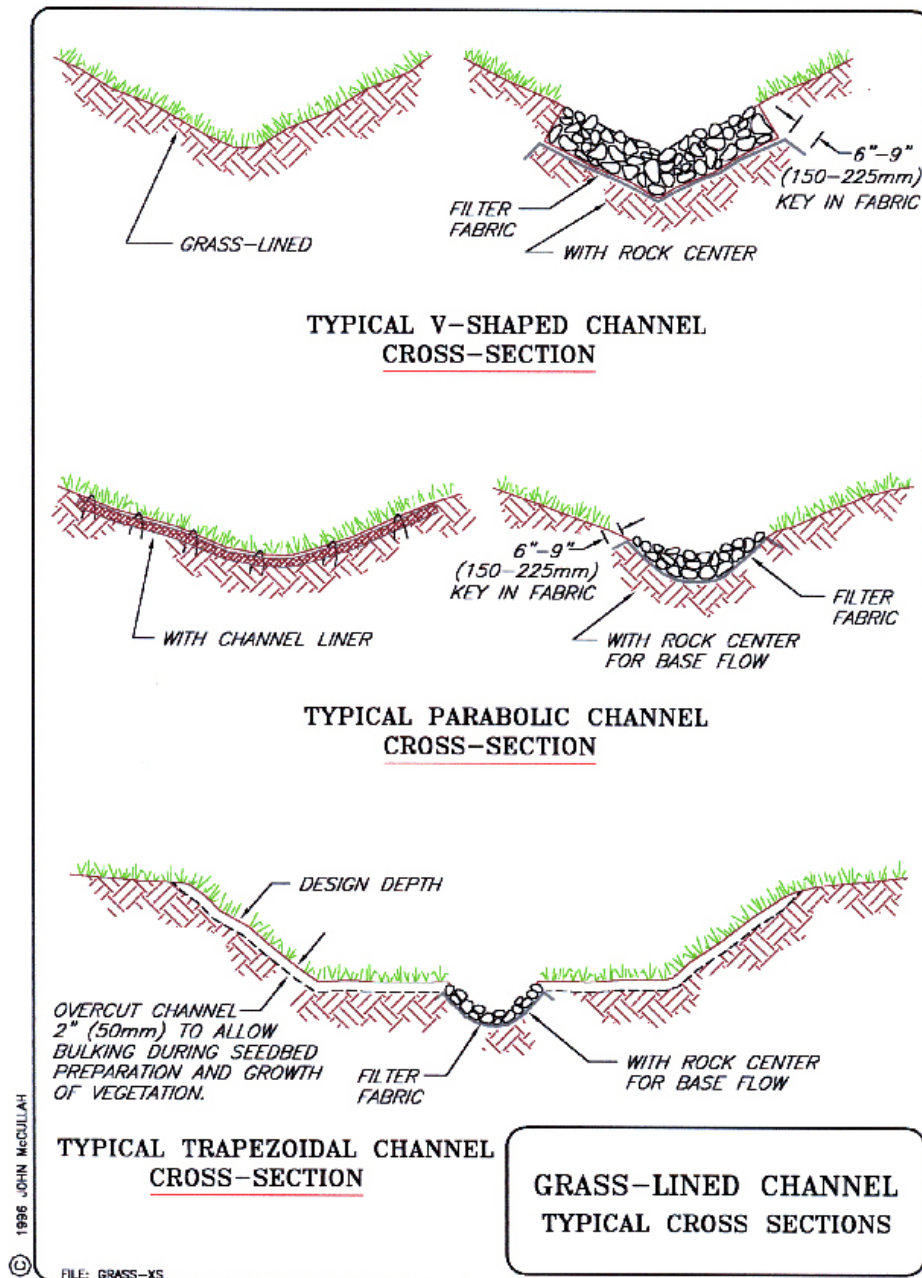

Design Feature 6. Green Roof – Green Grid

GREENGRID®
The Natural Choice for Your Roof



The PREMIER Green Roof System

The GreenGrid® Green Roof System

offers distinct advantages over more complex systems with its simplicity in design, pre-planted modules, and movable modular features.



WESTON
SOLUTIONS

www.greengridroofs.com

Introducing the GreenGrid® Modular Green Roof System

Simplicity in design and flexibility are the hallmarks of the GreenGrid® System. The system was designed by engineering, roofing, and horticultural experts to produce an efficient, integrated green roof product. GreenGrid® offers a modular design that arrives at your site pre-planted and ready for installation. The modules contain 100% recycled plastics, and the components can be hoisted to the roof via elevator, forklift, or crane, and quickly installed in accordance with the design. The modules can be placed directly on the roof membrane or on any other surface with adequate structural capacity.

GreenGrid® Green Roof System modules are lightweight compared to many other green roof systems. The Ultra-Extensive (2.5-inch depth) modules weigh approximately 11-13 pounds per square foot (wet). The Extensive (4-inch depth) modules weigh approximately 18-22 pounds per square foot (wet). Both Ultra-Extensive and Extensive modules support highly drought-resistant ground covers that can thrive in a non-irrigated (climate dependent), rooftop environment in the project location. The Intensive (8-inch depth) modules—supporting a large variety of variety of grasses, perennials, and/or



groundcovers that can thrive in an irrigated or non-irrigated, rooftop environment in the project location—weigh approximately 35 pounds per square foot (wet) and up, depending on plant selection and growth media. They can be easily arranged or rearranged to suit the needs and desires of the client. Most important, roof maintenance and repair is simple—modules can just be moved should roof repair/maintenance be required, then put back in place.



About Green Roofs



Green roofs are not a new phenomenon. Due to their excellent insulation and stormwater retention properties, these roofs have been a standard construction practice in many countries for years. Since the 1970s, green roofs increasingly have become part of the landscape in Europe, where there are over 100 million square feet of planted roofs today. Due to the complexity of some of these systems, green roofs have been somewhat slow to catch on in North America. These “European” systems are constructed in layers, starting with a waterproof membrane and drainage layer, then insulation, root barriers, soil layers, and a wind erosion blanket are put in place. The landscape is then installed, which can take considerable time to mature.

The GreenGrid® System offers distinct advantages over these complex systems with its straightforward design, pre-planted modules, and movable modular features.

System Options

Ultra-Extensive Modules

The 2.5-inch Ultra-Extensive GreenGrid® System is an extremely lightweight green roof system of modules, composed of 2.5 inches of growth media and drought-tolerant vegetation. This functional green roof system is generally designed to require minimal irrigation and maintenance. The 2.5-inch green roof system is appropriate for small applications with limited structural capacity. The approximate weight of a wet 2.5-inch GreenGrid® ultra-extensive green roof system is 11–13 pounds per square foot, which is similar to the weight of gravel ballast placed on many conventional roofs.

Extensive Modules

The 4-inch Extensive GreenGrid® System is a lightweight green roof modular system composed of a 4-inch layer of growth media and highly drought-tolerant vegetation that is composed of ground covers that can thrive in a non-irrigated (climate dependent), rooftop environment in the project location. Like the ultra-extensive modules, this highly functional green roof system is generally designed to require minimal irrigation and maintenance. The approximate weight of a wet 4-inch GreenGrid® extensive green roof system is 18-22 pounds per square foot.

Intensive Modules

The 8-inch Intensive GreenGrid® System is designed for more elaborate roof landscapes. These rooftop gardens are typically designed to be accessible for leisurely enjoyment and therefore must have the proper structural capacity for live loads. The 8-inch depth system allows for a larger selection of plants, including grasses, perennials, natives, and/or groundcovers. The addition of paver pathways, terraces, edge treatments, and other architectural features result in beautiful and dramatic new usable spaces. Depending on the plant selection, drip irrigation systems and maintenance may be necessary, just as they would be for a traditional garden. Although a more refined application, the ecological benefits of Intensive green roofs are wide-ranging due to the utilization of larger and greater plant species diversity. The average weight of a wet 8-inch GreenGrid® intensive green roof system starts around 35 pounds per square foot, and may be higher depending on plant selection and growth media.



The Advantages a GreenGrid® System Brings to Your Building

Easy Roof Maintenance and Repair: Since the GreenGrid® system is modular, roof surfaces are always accessible for maintenance and repair. “No matter the type or age of a roof, eventually it will leak. The question is, when,” said Larry Flynn, Senior Editor, *Building Design & Construction*¹. When the roof requires maintenance or repair, the GreenGrid® modules are simply removed and then put back in place when repair is complete, without disturbing growing media or plants.

Engineered, Integrated System: All components of the GreenGrid® Green Roof System are designed and engineered to work together. This results in installation efficiencies, thereby lowering costs, and assures an integrated design.

Lightweight for Existing/New Roofs: The GreenGrid® system can be installed on any roof in good condition where structural capacity is present. The choice of lightweight modules make a green roof feasible for almost any building, without requiring upgrades to its structural capacity.

Pre-Planted and/or Pre-Grown System: The GreenGrid® modules are planted in advance at the nursery. This means modules arrive at the job site already planted and ready for installation. This feature helps reduce costs associated with labor and helps reduce installation time. Plants can also be grown at the nursery in advance of shipment to the project site.



The table below presents additional GreenGrid® advantages.

GreenGrid® Advantages	GreenGrid® Green Roof System Solution	Traditional (Built-in-Place) Systems
Easy Roof Maintenance & Repair	Modules can easily be moved then put back in place without disturbing growing media or plantings	Layers need to be cut and rolled back until repair location found; plants and layers damaged
Competitive Installed Cost	Competitive installed cost versus leading built-in-place systems	New roof surface plus mat, drainage, root barrier, moisture retention layers often costly
Quick Installation	Delivered pre-planted, ready to set in place; reduced downtime due to inclement weather	Multi-layer, built-in-place, vegetation planted at job site, time-consuming
Pre-planted	Pre-planted at the nursery; speeds installation time and reduces labor costs	Planted on site; increases labor costs
Lightweight for Existing/ New Roofs	Lightweight—installs on any existing roof surface in good condition and with structural capacity	Systems often heavy; roof surface replacement often required despite condition
Easy Rooftop Placement	All modular system components quickly put in place on roof in accordance with design	Components delivered to rooftop by multiple sources can present scheduling difficulties
LEED® Recycling Credits	All GreenGrid® modules contain 100% recycled material, contributing to LEED® recycling credits	Components generally do not contain recycled material
Built-In Water Retention	Module design provides built-in water retention	Water retention layers must be added
Easy System Alteration/Additions	Option of installing green roof in sections offers opportunity for future add-ons	Often difficult and expensive to change/add-on due to edge design requirements
Alliances	Wrap-around or full-system warranties are available as part of a Mule-Hide or Carlisle GreenGrid® Roof	Limited Warranty – Removal and re-installation of plants/vegetation generally not included

¹ *Building Design & Construction*, 1 Sept. 2003, vol. 44, no. 9, p. 66

Reduced Energy Costs: When the outside air temperature reaches 95° F, traditional black rooftop surface temperatures can be as high as 175° F. The heat load of a roof impacts the amount of energy necessary to cool the building to the desired temperature. Due to its insulating properties, GreenGrid® green roofs can significantly reduce the heat load of the roof in warm seasons.


Reduced Urban Heat Island Effect: The urban heat island effect occurs in most of the large cities of the world and has actually been shown to change weather patterns in some. Roads and building rooftops absorb a significant amount of heat during the day, which in turn is radiated back into the atmosphere, causing further warming. GreenGrid® green roofs help insulate and shade buildings. Plus, the plants on green roofs transpire, cooling the atmosphere around them.

Stormwater Management: Green roofs help alleviate stormwater runoff through retention and detention of rainfall and detention of runoff from roofs. This benefit can cut costs associated with required municipal on-site stormwater retention.


Sound Insulation: The growth media, plants, and layers of trapped air in a green roof system serve as excellent sound insulators. Tests have shown that green roofs can reduce the indoor noise pollution from outdoor contributors by as much as 10 decibels per every 3 inches of soil media.

Extended Roof Life: GreenGrid® green roofs can protect roof membranes from ultraviolet radiation, extreme temperature fluctuations, and puncture or other physical damage.


Creation of Added Value and Aesthetics: Green roofs can provide an oasis of green in the urban environment by creating visually pleasing vistas, serene rooftop gardens, and functional gathering areas.

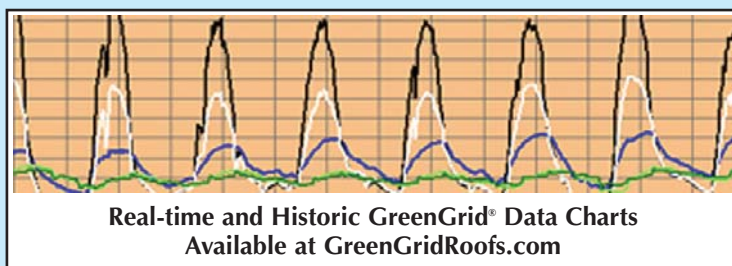

Cumulative Water Retention in a 4-Inch GreenGrid® Module During a Simulated 2-Hour Rainstorm

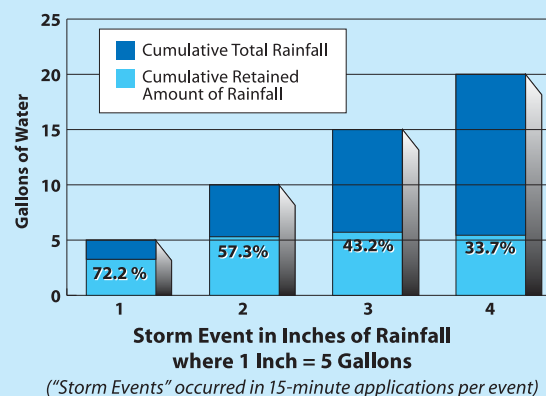

Cumulative Water Retention in an 8-Inch GreenGrid® Module During a Simulated 2-Hour Rainstorm

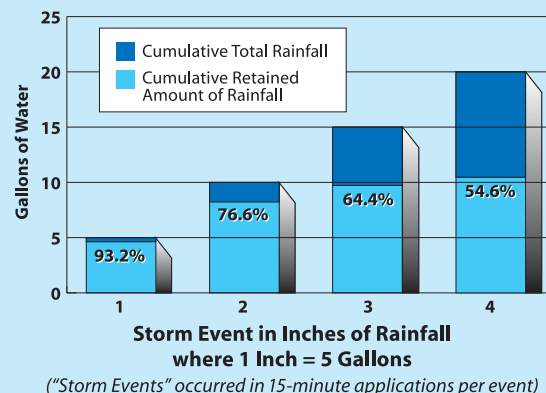

GreenGrid® Projects



APPLE COMPUTER STORE - NORTH MICHIGAN AVENUE

Client: Apple Computer, Inc.
Location: 679 N. Michigan Ave., Chicago, IL
GreenGrid® Size: 2,400 Square Feet
Installation Contractor: WESTON
Landscape Design: Douglas Hoerr Landscape Architecture
Rooftop System: Extensive
Status: Completed Summer 2003



AMERICAN RED CROSS OF GREATER CHICAGO - RAUNER CENTER

Client: American Red Cross of Greater Chicago
Location: 2200 W. Harrison St., Chicago, IL
GreenGrid® Size: 2,800 Square Feet
Installation Contractor: WESTON
Landscape Design: Douglas Hoerr Landscape Architecture
Rooftop System: Extensive
Status: Completed Summer 2004



MILWAUKEE HOUSING AUTHORITY - HIGHLAND GARDENS

Client: Milwaukee Housing Authority
Location: 1818 W. Juneau Ave., Milwaukee, WI
GreenGrid® Size: 20,032 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive
Status: Completed Fall 2004



UWM GREAT LAKES WATER INSTITUTE

Client: University of Wisconsin-Milwaukee – Great Lakes Water Institute
Location: 600 E. Greenfield Ave., Milwaukee, WI
GreenGrid® Size: 6,480 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive/Intensive
Status: Completed Summer 2003



U.S. EPA REGION 8 HEADQUARTERS

Client: U.S. Environmental Protection Agency
Location: 1595 Wynkoop St., Denver, CO
GreenGrid® Size: 19,396 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive
Status: Completed Fall 2006



HASTINGS KEITH FEDERAL OFFICE BUILDING

Building Owner: United States General Services Administration
Client: J & J Contractors, Inc.
Location: Hastings Keith Federal Office Building, 56 North 6th St., New Bedford, MA
GreenGrid® Size: 3,400 Square Feet
Installation Contractor: WESTON and J & J Contractors, Inc.
Landscape Design: Oak Point Associates
Rooftop System: Extensive
Status: Completed Spring 2004



KOHL'S RETAIL STORE

Client: Kohl's Illinois, Inc.
Location: 2140 N. Elston Ave., Chicago, IL
GreenGrid® Size: 32,500 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive
Status: Completed Spring 2005



BARBER PARK GREEN BUILDING

Client: Ada County Parks & Recreation
Location: 4049 S. Eckert Rd., Boise, ID
GreenGrid® Size: 3,660 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Ultra-Extensive
Status: Completed Summer 2005



HOLY REDEEMER CATHOLIC CHURCH

Client: Holy Redeemer Catholic Church
Location: 25 N. Rosa Parks Way, Portland, OR
GreenGrid® Size: 4,464 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive
Status: Completed Summer 2005



IKEA STORE

Client: IKEA US
Location: 1 Ikea Way, Stoughton, MA
GreenGrid® Size: 21,376 Square Feet
Installation Contractor: WESTON
Landscape Design: WESTON
Rooftop System: Extensive
Status: Completed Summer 2005



CENTER FOR URBAN ECOLOGY

Client: National Parks Service
Location: 4598 MacArthur Blvd., Washington, DC
GreenGrid® Size: 6,500 Square Feet
Installation Contractor: WESTON/Platinum One Contracting
Landscape Design: U.S. Department of the Interior
Rooftop System: Extensive
Status: Completed Summer 2004



SUSTAINABLE SOUTH BRONX

Client: Sustainable South Bronx
Location: 890 Garrison Ave., Bronx, NY
GreenGrid® Size: 1,052 Square Feet
Installation Contractor: WESTON/Corporate Contractors, Inc.
Landscape Design: WESTON
Rooftop System: Intensive/Extensive
Status: Completed Summer 2005



NATTY BOH BREWERY REDEVELOPMENT

Client: Natty Boh Brewery
Location: 3600 O'Donnell St., Baltimore, MD
GreenGrid® Size: 12,000 Square Feet
Installation Contractor: WESTON
Landscape Design: Cho Benn Holback & Associates
Rooftop System: Extensive
Status: Completed Fall 2005

Optional Features

Additional features are available to enhance the benefits and aesthetic appeal of your green roof. Whether your goal is to create a pleasing and enjoyable space, or optimize the beneficial use of your building's roof space, there are many options available to make the most of your GreenGrid® Green Roof System.



Beneficial Enhancements

- Ecoballast®—These modules can be added to augment stormwater retention.
- Drip Irrigation Systems—Some configurations may require the installation of a drip irrigation system, due to climate and/or plant selection.



Ecoballast®



Drip Irrigation System

Aesthetic Enhancements

- Pavers
- Edge Treatment
- Outdoor Furniture and Planter Boxes



Pavers



Edge Treatment



Outdoor Furniture & Planter Boxes



Contact Information

States not listed: Please contact the Midwest Division

MIDWEST DIVISION

(IA, IL, MI, MN, MO, ND, SD, WI)

Suite 500 • 750 E. Bunker Court

Vernon Hills, IL 60061

847-918-4000 phone • 847-918-4055 fax

Tom Hanzely

T.Hanzely@greengridroofs.com

LOWER MIDWEST DIVISION

(IN, KS, KY, NE, OH, TN)

Suite 150 • 10200 Alliance Road

Cincinnati, OH 45242

513-826-2304 phone • 513-826-2346 fax

Amy Mead

Amy.Mead@greengridroofs.com

MID-ATLANTIC DIVISION

(DC, DE, MD, PA, VA, WV)

1400 Weston Way • PO Box 2653

West Chester, PA 19380

610-701-5061 phone • 610-701-7401 fax

Chris Dorman

Chris.Dorman@greengridroofs.com

NORTHEAST DIVISION

(CT, MA, ME, NH, NJ, NY, RI, VT)

148 Eastern Boulevard

Glastonbury, CT 06033-4321

860-368-3204 phone • 860-368-3201 fax

Jared Markham

Jared.Markham@greengridroofs.com

MOUNTAIN DIVISION (CO, MT, WY)

Suite 810 • 143 Union Boulevard

Lakewood, CO 80228-1824

303-729-6114 phone • 303-729-6101 fax

Mark Blanchard

M.Blanchard@greengridroofs.com

6760 Corporate Drive • Suite 100

Colorado Springs, CO 80919

719-260-4463 phone • 719-590-7310 fax

Tom Mitchell

Tom.Mitchell@greengridroofs.com

NORTHWEST DIVISION (ID, OR, WA)

Suite 200 • 190 Queen Anne Avenue

Seattle, WA 98109-4926

206-521-7692 phone • 206-521-7601 fax

Larry Vanselow

Larry.Vanselow@greengridroofs.com

SOUTHEAST DIVISION

(AL, GA, MS, NC, SC)

Suite 100 • 5430 Metric Place

Norcross, GA 30092-2250

770-325-7950 fax

Kim Veal

770-325-7942 phone

Kim.Veal@greengridroofs.com

Greg Harper

770-325-7972 phone

Greg.Harper@greengridroofs.com

CALIFORNIA

Suite 1000 • 14724 Ventura Boulevard

Sherman Oaks, CA 91403-3501

818-464-7080 phone • 818-905-5691 fax

Michael Rieger

Michael.Rieger@greengridroofs.com

SOUTH CENTRAL DIVISION (AR, LA, OK, TX)

901 South MoPac Expressway

Austin, TX 78746

512-651-7146 phone • 512-651-7101 fax

David Dippel

David.Dippel@greengridroofs.com

Suite 700 • 5599 San Felipe

Houston, TX 77056-2721

512-651-7146 phone • 512-651-7101 fax

Ryan Leatherbury

Ryan.Leatherbury@greengridroofs.com

Suite 600 • 70 NE Loop 410

San Antonio, TX 78216-5842

210-248-2419 phone • 210-308-4329 fax

Sandra Lyda

Sandra.Lyda@greengridroofs.com

Suite 850 • 14160 Dallas Parkway

Dallas, TX 75254

469-374-7787 • 469-374-7740 fax

Roger Smith


Roger.Smith@greengridroofs.com

GreenGrid and ABC Supply Co., Inc., are trademarks of American Builders & Contractors Supply Co., Inc. The GreenGrid® System is a proprietary technology of ABC Supply Co. U.S. and international patents pending. WESTON is the exclusive licensee of the GreenGrid® System in the U.S. All GreenGrid® projects in the United States are performed by Weston Solutions, Inc., or its designees pursuant to such license.

www.greengridroofs.com

Design Feature 7. Infiltration Trench

Figure from The Storm Water Manager's Resource Center's Infiltration Trench fact sheet, <http://www.stormwatercenter.net/>

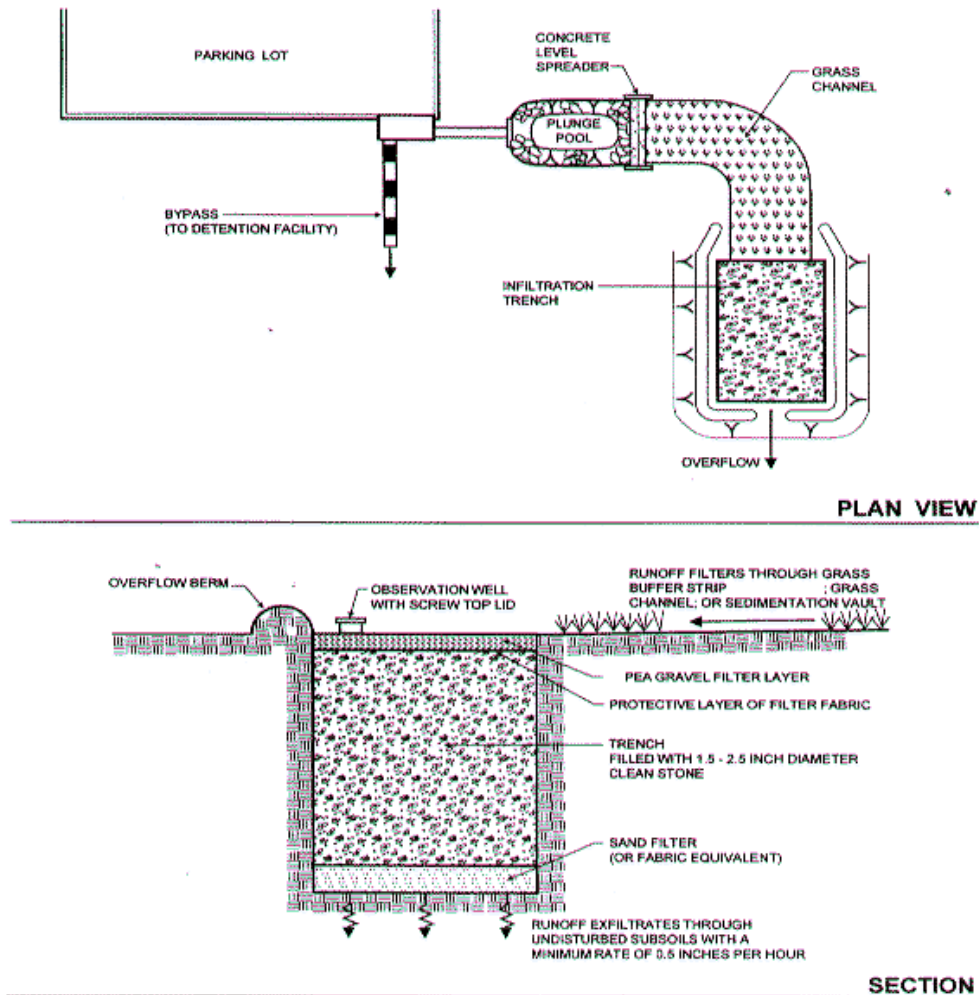

Design Feature 8. Modular Wetland

INTRODUCING **MWS-LINEAR** STORMWATER FILTRATION SYSTEM

NATURE AND TECHNOLOGY WORKING TOGETHER IN PERFECT HARMONY.

The need for a new stormwater treatment system is evident. Federal and state requirements on cities and industry to reduce stormwater runoff increase every year as our population explodes. The EPA is now reporting that stormwater runoff represents the nation's number one water quality problem, and is the reason why nearly half of our rivers and lakes are not even clean enough to support fishing or swimming. *Nearly half.*



To combat this catastrophe, we turned to the expert in this field: *Nature*. By developing technology that imitates the processes found in nature, we've created the most advanced stormwater filtration system available. Years ahead of current EPA requirements, our clients understand that when they invest in our new technology, they are investing in the future. For all of us.



MWS-LINEAR TESTED REMOVAL EFFICIENCIES*

TSS "Sil-Co-Sil 106"	Dissolved Cadmium	Dissolved Copper	Dissolved Lead	Dissolved Zinc	Dissolved Mercury	Bacteria E. Coli
98%	74%	93%	81%	80%	89%	60%

*Laboratory Testing of Quarter Scale Model- Average Removal Efficiencies. Tested at Scaled Flow Rate Equal To 120 GPM For Full Size System.

BioMedia**GREEN** TESTED REMOVAL EFFICIENCIES*

TSS "Sil-Co-Sil 106"	Total Phosphorus	Dissolved Copper	Dissolved Lead	Dissolved Zinc	TPH	Turbidity
85%	69%	79%	98%	78%	99%	99%

*Laboratory Testing - Average Removal Efficiencies. Tested at Flow Rate of 3 GPM Per Square Foot Media Surface Area & Minimum Head.


CURB & GRATE TYPE FLOW BASED DESIGN

- Primary Treatment Peak Flow Rate = 120 GPM or .27 CFS
- Internal Bypass Peak Flow Rate = 4.28 CFS "Grate Type"
- Internal Bypass Peak Flow Rate = 2.01 CFS "Curb Type"
- O.D Dimensions = 22' x 5' x 4.8'
- Curb Type Minimum Fall Required = 3.57' "Flow Line to Invert Out"
- Grate Type Minimum Fall Required = 4.13' "Top of Grate to Invert Out"
- Storage Capacity = 1000 LBS "Settling Chamber Storage"

VAULT TYPE VOLUME BASED DESIGN (Configuration not shown)

- Peak Treatment Volume = 4000 Cubic Feet
"10 GPM Discharge Rate & 48 Hour Drain Down Time" "Pre-Storage Required"
- Install External Bypass Prior To Pre-Storage
- O.D Dimensions (at grade) = 22' x 5' x 4.8'
- O.D Dimensions (below grade) = 22' x 5' x 5.6'
- Vault Type Minimum Fall Required = 4.13' "Finish Grade to Invert Out"
- Storage Capacity = 1000 LBS "Settling Chamber Storage"

SYSTEM OPERATIONS

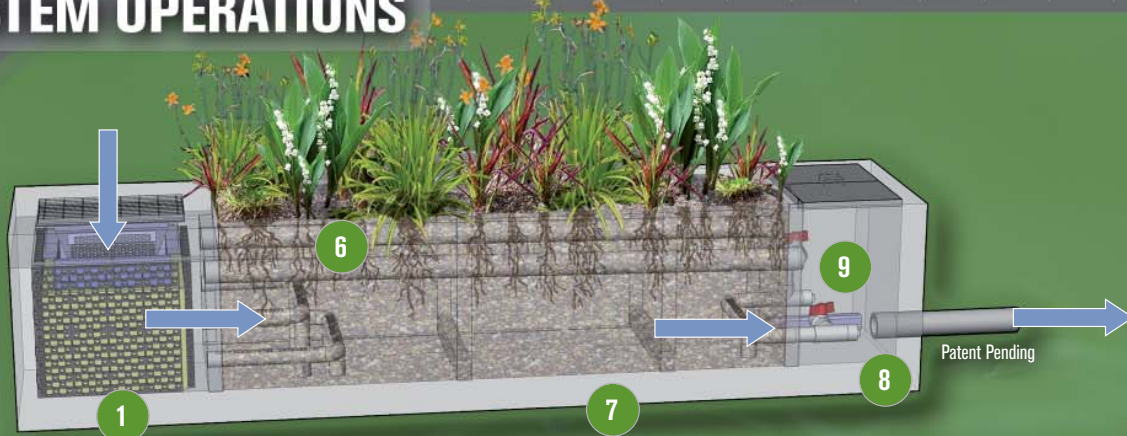


MWS-LINEAR IS DESIGNED TO MEET THE MOST STRINGENT STORMWATER REGULATIONS.

The system utilizes multi-stage treatment processes including the revolutionary filter media (BioMediaGreen) for primary filtration followed by a 4th generation sub-surface flow wetland for biological remediation.

Utilizing the revolutionary filter media:

BioMediaGREEN

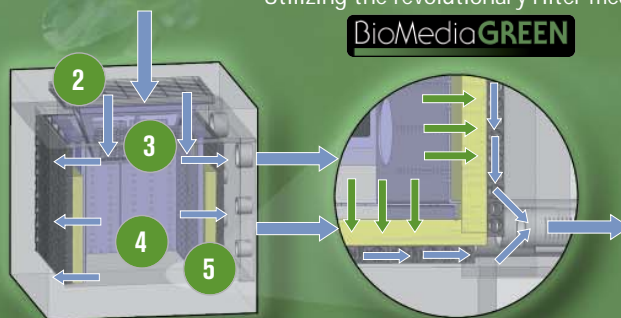

THIS SYSTEM PROVIDES THE MOST EFFECTIVE TREATMENT IN THE INDUSTRY.

FEATURES

- 1 **CATCH BASIN CHAMBER - Capture, Screen, Separate, Filter**
Directs Incoming Stormwater Through The First Three Stages of Treatment.
- 2 **GRATE TYPE CATCH BASIN INLET**
A standard 41" x 24" grate type traffic rated catch basin opening directs stormwater into the system.
- 3 **CATCH BASIN INSERT FILTER UTILIZING **BIO CLEAN** - CATCH BASIN FILTERS**
Provides the first stage of treatment by capturing trash & litter, gross solids, and sediment.
- 4 **SETTLING CHAMBER**
Provides the second stage of treatment by separating out larger suspended solids.
- 5 **PERIMETER FILTER UTILIZING **BioMediaGREEN** SEE TESTED REMOVAL EFFICIENCIES**
Provides the third stage of treatment by physically and chemically capturing fine TSS, metals, nutrients, and bacteria.
- 6 **HIGH FLOW INTERNAL BYPASS**
Flow rates greater than the systems treatment capacity are bypassed directly to the discharge chamber.
- 7 **WETLAND CHAMBER SUB-SURFACE FLOW - Biological Remediation**
Provides the final stage of treatment through a combination of physical, chemical, and biological processes.
- 8 **DISCHARGE CHAMBER - Flow Control, Drain Down, Discharge**
Controls flow rates with adjustable valves and contains a drain down filter that eliminates any standing water.
- 9 **MULTI-LEVEL FLOW CONTROL VALVES**
Two 4" adjustable ball valves allows various flow rates to be set for primary and secondary treatment levels.



MODULAR WETLANDS

T 760.433.7640 E info@modularwetlands.com www.modularwetlands.com

Design Feature 9. Rain Barrels

What is a Rain Barrel?

**Environmental Assessment & Innovation Division
EPA Region 3, Philadelphia, PA**

A rain barrel is a system that collects and stores rainwater from your roof that would otherwise be lost to runoff and diverted to storm drains and streams. Usually a rain barrel is composed of a 55 gallon drum, a vinyl hose, PVC couplings, a screen grate to keep debris and insects out, and other off-the-shelf items, a rain barrel is relatively simple and inexpensive to construct and can sit conveniently under any residential gutter down spout.

What are the advantages of a rain barrel?

Lawn and garden watering make up nearly 40% of total household water use during the summer. A rain barrel collects water and stores it for when you need it most -- during periods of drought -- to water plants, wash your car, or to top a swimming pool. It provides an ample supply of free "soft water" to homeowners, containing no chlorine, lime or calcium making it ideal for gardens, flower pots, and car and window washing.



A rain barrel used to collect rooftop runoff using a gutter / downspout system

A rain barrel will save most homeowners about 1,300 gallons of water during the peak summer months. Saving water not only helps protect the environment, it saves you money and energy (decreased demand for treated tap water). Diverting water from storm drains also decreases the impact of runoff to streams. Therefore, a rain barrel is an easy way for you to have a consistent supply of clean, fresh water for outdoor use, FREE.

Where can I buy a ready-made rain barrel?

Ready-made rain barrels can be purchased from a number of companies, including hardware stores and garden supply stores. In addition, local governments sometimes offer them for a reduced price as part of their environmental education programs. Below are just a few sources (this listing does not constitute an endorsement by EPA). All links below exit EPA.

- [Ace Hardware](#) has a couple of models, 866-290-5334
- [Gaiam](#) produces the Great American Rain Barrel, 877-989-6321
- [Plow & Hearth](#) has several rain barrels including a pop-up barrel that folds flat when not needed, 800-494-7544
- [Rain Barrel Source](#) offers an extra large system, 866-912-9719
- [Spruce Creek Company](#) produces the Spruce Creek Rainsaver, 800-940-0187
- [Urban Garden Center](#) sells the Urban Rain Barrel, 866-923-1992

Design Feature 10. Retention Pond

Retention Pond



During the first year of operation, the retention pond at UNHSC was reasonably effective in removing many of the pollutants commonly found in runoff. However, during its second year, researchers observed a reduction in its water quality performance. This indicates that its performance may continue to diminish over time.

Retention ponds, or “wet ponds,” are among the most common stormwater treatment systems used today. They are not to be confused with detention basins or “dry basins,” which hold runoff for a specified period of time, and then release the entire volume of the runoff. Retention ponds retain a resident pool of standing water, which improves water quality treatment between storms. Retention ponds demonstrate a reasonably strong water quality treatment, particularly in comparison to dry pond systems. However, lack of maintenance often leads to pollutant export and a gradual erosion within the system for large flows.

Where to Use It

Acceptance of retention ponds is widespread, and examples of these systems can be found all over the world in any climate, soil, and development setting.

In many areas, retention ponds are the system of choice, a preference likely due to their ease of design, which can be adapted to provide water quality treatment and water quantity control in a variety of settings.

Implementation

While retention ponds are common, their use raises concerns related to human and ecosystem health. Standing water, for example, can be a drowning hazard. They also serve as a habitat for mosquitoes associated with diseases. Ponds that contain excess nutrients can foster eutrophication. In hot weather, retention ponds can superheat already warm parking lot runoff, impacting aquatic habitats and cold water fisheries. Some innovative retention pond outlet designs include the use of gravel subdrains to cool effluent.

The cost to install a retention pond system to treat runoff from one acre of impervious surface was \$13,500. This does not include maintenance expenditures, which may involve routine inspection, periodic mowing, and sediment dredging, as needed. For more information about this design, contact the UNHSC.

Fast Facts

CATEGORY TYPE

Stormwater Pond, Sedimentation

BMP TYPE

Structural, Conventional

DESIGN SOURCE

New York State Stormwater Management Design Manual

BASIC DIMENSIONS

Surface Area: 46 ft X 70 ft (varies)

SPECIFICATIONS

Catchment Area: 1 acre
Peak Flow: 1 cfs
Water Quality Volume: 3,264 cf

TREATMENT FUNCTION

Physical Settling & Biological

INSTALLATION COST PER ACRE TREATED

\$13,500

MAINTENANCE

Maintenance Sensitivity: Low
Inspections: Low
Sediment: Low

How the System Works

Design

The retention pond tested at the UNHSC is comprised of a sedimentation forebay and a larger basin sized to hold a resident pool of water. It was installed below the water table to maintain a permanent pool of water, and in clay soils, which effectively act as a lining for the system. Side slopes were stabilized with grass, and spillways with stone and geotextile.


Improved designs, not used here, would include stabilization of wetland perimeter with stone and fabric. This perimeter was the location of failure for the pond. In this area, vegetation could not establish and soils were prone to erosion.

In general, these ponds can be designed either above or below the groundwater table. Ponds are commonly designed for both aesthetic and habitat function.


The system is designed to treat the water quality volume. Typically, channel protection volumes (CPV) are conveyed through the system within 24 to 48 hours.

During conveyance protection volume (Qp) rain events, stormwater is conveyed through the system, and bypasses the water quality treatment process.

POLLUTANT REMOVAL: 2004–2006

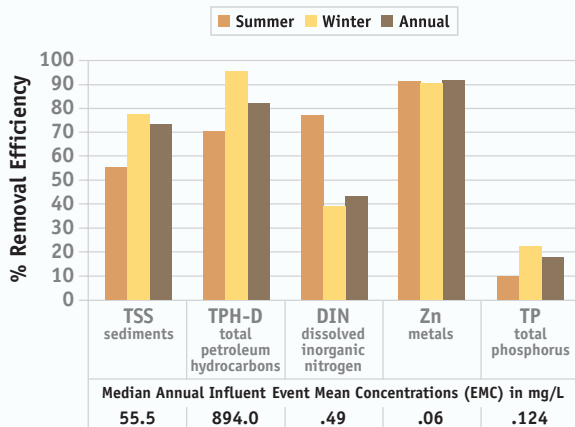

HYDRAULIC PERFORMANCE

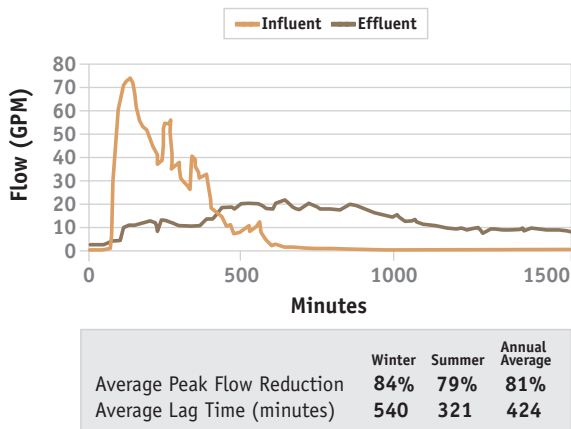

Water Quality Treatment

During the first year of operation, the retention pond was reasonably effective in removing many of the pollutants commonly found in runoff. It consistently met EPA's recommended level of removal for total suspended solids, as well as regional ambient water quality criteria for petroleum products, metals, and nutrients. However, during its second year, researchers observed a 25 percent reduction in its TSS median removal efficiency—from 81 percent down to 71 percent. This indicates that while the pond still effectively treats most contaminants, its performance may continue to diminish. Like the other systems evaluated at UNHSC, it does not provide chloride removal, but can dampen chloride peaks.

The chart at top left reflects the system's performance in removing total suspended solids, total petroleum hydrocarbons, dissolved inorganic nitrogen, total phosphorus, and zinc. Values represent results recorded over a two-year monitoring period, with the data further divided into summer and winter components.

Water Quantity Control

Retention ponds exhibit a tremendous capacity to reduce peak flows, retain channel protection volume, and provide flood protection for up to 48 hours. In the figure at bottom left, the retention pond demonstrates effective peak flow reduction and long lag times, regardless of season. However, in general, these systems do not reduce runoff volume.

Research indicates that the extended duration effluent flows typical of retention ponds negatively impact receiving streams, particularly when post-development runoff subjects streams to erosive flows for long periods. This phenomenon is observed in urban areas, where it leads to channel instability and lost ecological value and function.


Maintenance

Minimal need for maintenance contributes to the popularity of retention ponds. However, while little maintenance may be required to support their ability to manage peak flow and floods, more frequent attention is critical for effective water quality treatment. Previous research has demonstrated that erosion and re-suspension of benthic sediments in these systems leads to sediment export. Since sedimentation is the main water quality treatment mechanism, inspections are critical to maintaining performance in sites with heavy sediment loads. Dredging for debris and trash is also needed. While not necessary for these systems to function, the establishment of a viable pond ecosystem can enhance treatment, prolong the system's lifespan, and increase aesthetic appeal.

Cold Climate


The system's ability to treat water quality and manage water quantity remained effective during cold winter months. While some variation in both kinds of performance does occur in cold conditions, it does not warrant significant alterations to system design to compensate.

Water Quality Treatment Process

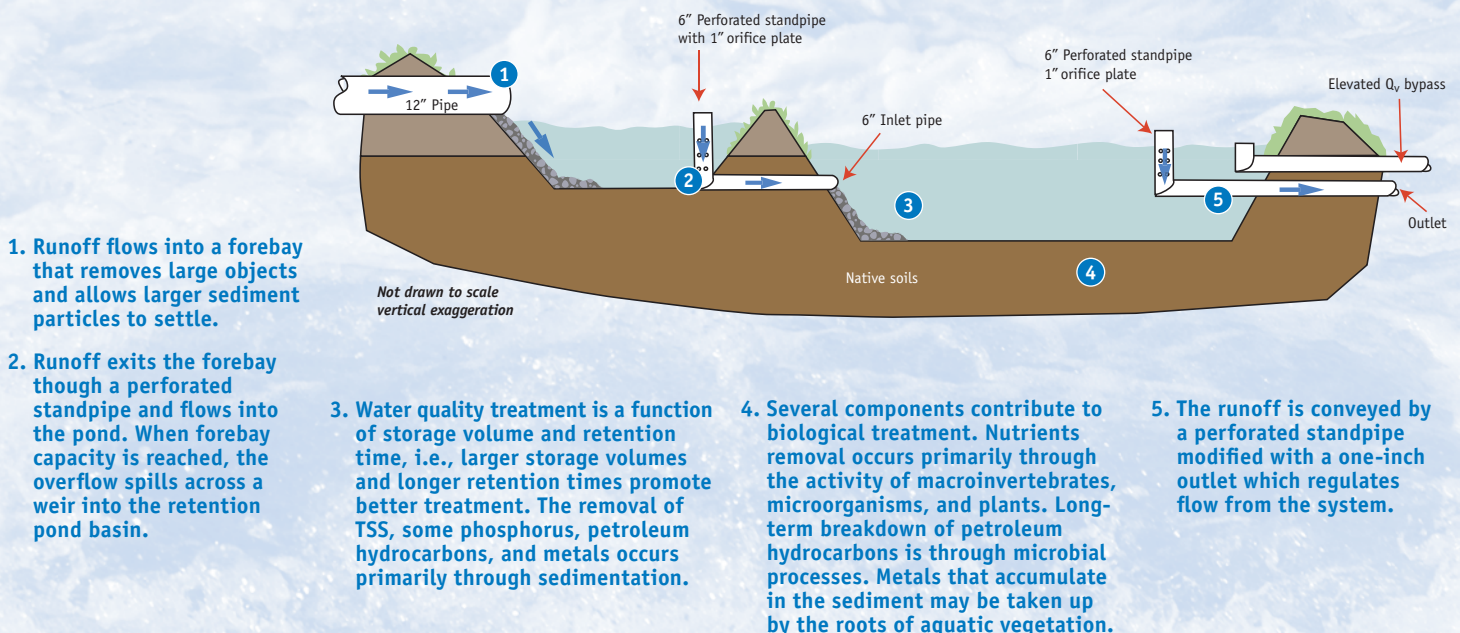

Design Feature 11. Subsurface Storage

STORMTANK™ STORMWATER STORAGE MODULES

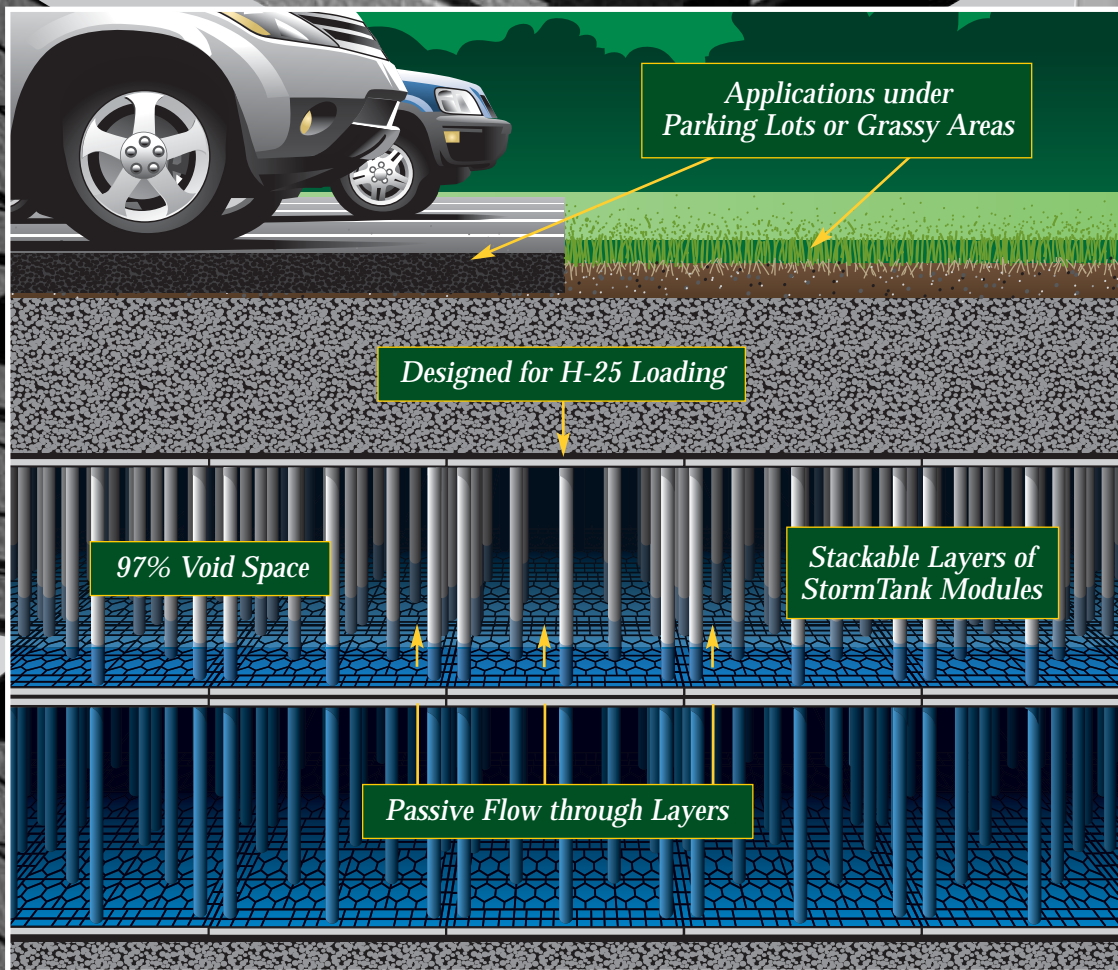


StormTank™


Stormwater Storage Modules are a high-void, strong, affordable alternative to crushed stone, concrete structures, or pipe chambers for sub-surface stormwater detention or infiltration basins.

 **BRENTWOOD**
INDUSTRIES

STORMTANK™ STORMWATER STORAGE SYSTEM

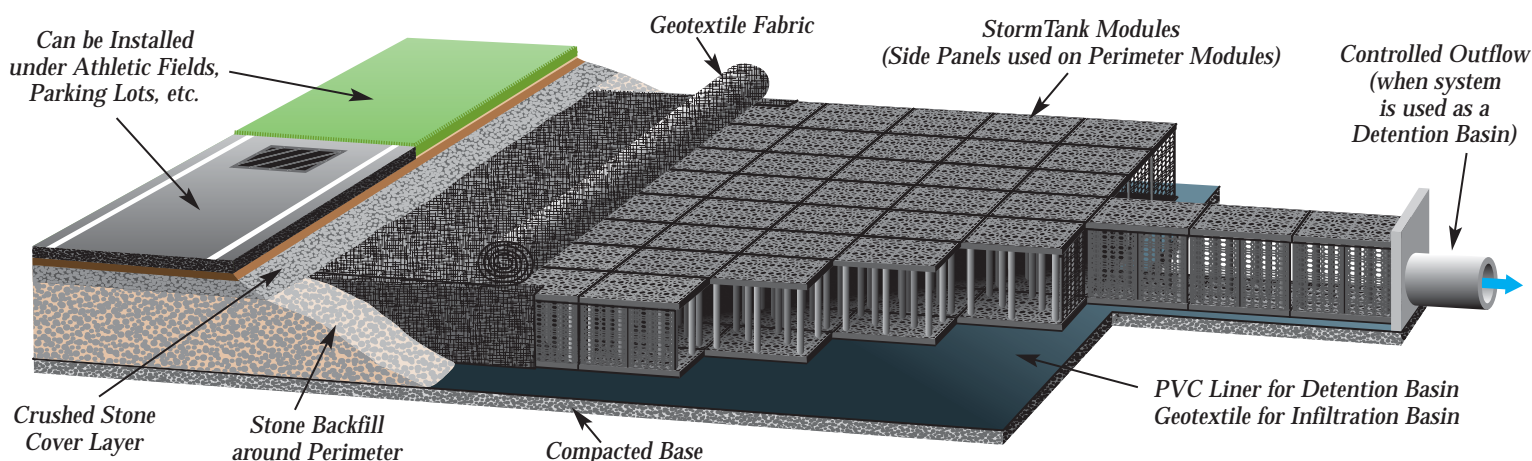

Brentwood's StormTank™ Stormwater Storage System is a high-void, strong, affordable alternative to crushed stone, concrete structures, or pipe chambers for sub-surface stormwater detention or infiltration basins.

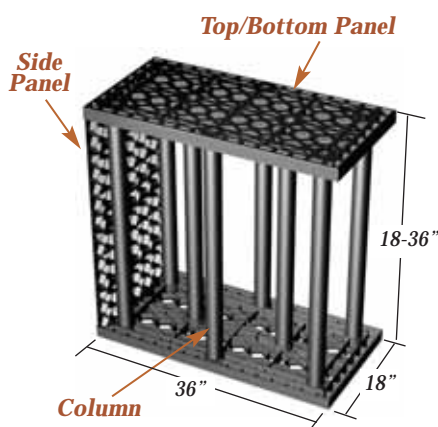

HIGH VOID, HIGH STRENGTH Our modules offer the largest void space of any underground stormwater storage units currently on the market (97%), and are load-rated for use under parking lots, athletic fields, parks, etc. (Designed to exceed H-25 loading criteria)!

EASY TO INSTALL The entire StormTank Storage System is built on-site from Top/Bottom Panels and Side Panels made of rugged, lightweight polypropylene and 2-3/8" diameter PVC columns. Combinations of these three components create all the module configurations needed for a fully-functioning underground system (see example at top). To minimize shipping costs, the StormTank components are delivered unassembled, but on-site assembly is a snap!

No special equipment, tools, or bonding agents are needed to assemble or install the modules. All components easily attach with a secure concentric pressure fit.

EASY TO CLEAN The open tops/bottoms and sides of the modules makes flushing and cleaning easy ... a great advantage over storage systems where access is limited.

SAVES SPACE AND MONEY Because of its 97% void space, stackability, and H-25 strength, a StormTank system offers significant space and cost savings when compared to conventional stormwater storage solutions. For example:

- A StormTank installation requires a much smaller footprint than a crushed rock system with the same amount of stormwater storage capacity. And less space used also means less expense for excavation, geotextile, liner, installation, and backfill.
- Because a StormTank system is installed underground, it frees up surface space for uses that would be otherwise unavailable with a typical detention pond.
- StormTank's stackability and variable column height (18"-36") can maximize the use of a site with limited surface area.



The Brentwood AccuPier Support System (above) has been in use for several years and is installed in over 50 biological oxidation towers throughout the U.S. and Canada. Each PVC AccuPier column, fitted with upper and lower base caps, can hold 7000 lbs. and has been compression-tested to 24,000 lbs. All the technology, materials, and experience gained from the AccuPier System have been applied to our new StormTank Modules.



Brentwood Industries, Inc.

Mailing Address P.O. Box 605, Reading, PA 19603, USA

Shipping Address 610 Morgantown Rd., Reading, PA 19611


Phone 610.236.1100 Fax 610.736.1280

Email wwsales@brentw.com

Website www.BrentwoodProcess.com

Design Feature 12. Turf Reinforcement Mats

LANDLOK® TURF REINFORCEMENT MATS

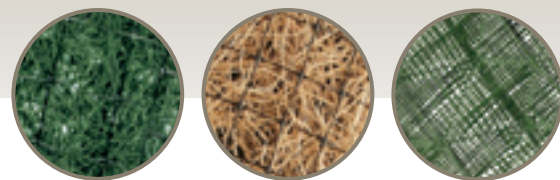


Our Landlok® Turf Reinforcement Mats (TRMs) are the industry's most advanced solutions for applications requiring immediate, long-term erosion protection, vegetative reinforcement and water quality enhancement capabilities. Our first generation TRMs are constructed of a dense web of 100% polypropylene fibers positioned between two biaxially oriented nets. When vegetated, they provide twice the erosion protection of vegetation alone.

Now we've taken the same woven technology in our High Performance Turf Reinforcement Mats (HPTRMs) and used it to design the next generation of TRMs. These netless, composite-free three-dimensional second generation TRMs feature a rugged material construction that combines superior tensile strength, flexibility and UV stability. This allows them to deliver better, long-term performance over traditional methods like rock riprap and concrete paving and increased design life over first generation netted, fused, glued or stitch-bonded TRMs. All Landlok TRMs feature our patented X3® fiber technology, which provides 40% greater surface area for trapping and protecting seed and soil.

1ST GENERATION LANDLOK® TRMs FEATURES & BENEFITS

- Provides permanent turf reinforcement to enhance vegetation's natural ability to filter soil particles and prevent soil loss during storm events
- 100% synthetic and UV-stabilized components
- Utilizes X3 fiber technology for up to 40% greater surface area to protect emerging seedlings and sediment retention
- Promotes infiltration which leads to groundwater recharge
- More aesthetically pleasing than conventional methods (i.e. rock riprap and concrete paving)
- Superior product testing and performance
- Easier installation than conventional solutions (no heavy equipment required)

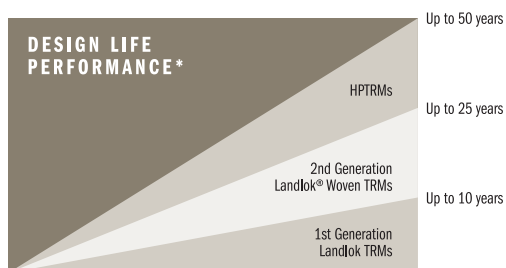

*Design life performance may vary depending upon field conditions and applications.

2ND GENERATION LANDLOK® WOVEN TRMs FEATURES & BENEFITS




All the features and benefits of first generation Landlok TRMs, plus:

- A unique, patented matrix of pyramids formed with X3 fibers that gridlocks soil in place under high-flow conditions
- 3-D woven material with superior tensile strength for loading and/or survivability requirements
- Greater flexibility to maintain intimate contact with subgrade, resulting in rapid seedling emergence and minimal soil loss
- Completely interconnected yarns that provide superior UV resistance throughout the TRM
- A combination of superior characteristics for long-term performance and a longer design life than first generation Landlok TRMs
- Meets requirement of 5 mm² or less mesh size to prevent wildlife entanglement in any sensitive habitats

Outperforms and is more cost-effective than conventional erosion control methods, including:

- Rock riprap
- Concrete paving
- Erosion Control Blankets (ECBs)

LANDLOK® TURF REINFORCEMENT MATS PRODUCT FAMILY TABLE

PRODUCT	DESCRIPTION	FUNCTIONAL LONGEVITY	COLOR	FIBER TYPE	# OF NETS	FHWA FP-03, SECTION 713 COMPLIANCE
 LANDLOK® 450	1ST GENERATION TRM	PERMANENT	TAN OR GREEN	POLYPROPYLENE X3® FIBER TECHNOLOGY	2	TYPE 5A, 5B, 5C
 LANDLOK 1051	1ST GENERATION TRM	PERMANENT	TAN	POLYPROPYLENE X3 FIBER TECHNOLOGY (GEOTEXTILE BACKING)	1	TYPE 5A, 5B, 5C
 LANDLOK 300	2ND GENERATION TRM	PERMANENT	TAN OR GREEN	POLYPROPYLENE X3 FIBER TECHNOLOGY	0 (WOVEN)	TYPE 5A, 5B, 5C

LANDLOK® TURF REINFORCEMENT MATS

APPLICATION SUGGESTIONS FOR LANDLOK® TURF REINFORCEMENT MATS

	APPLICATION	FUNCTIONAL LONGEVITY	PRODUCT STYLE	INSTALLED COST ¹	ANCHOR SUGGESTIONS ⁵
SLOPES ²	UP TO 1H:1V	PERMANENT	LANDLOK® 300	\$10.00 - 15.00/yd ² \$11.96 - 17.94/m ²	2.5 ANCHORS/yd ² 3 ANCHORS/m ²
	UP TO 1.5H:1V	PERMANENT	LANDLOK 450	\$9.00 - 14.00/yd ² \$10.77 - 16.75/m ²	2 ANCHORS/yd ² 2.5 ANCHORS/m ²
	UP TO 2H:1V				
CHANNELS ³	SHEAR STRESS UP TO 10 lb/ft ² (479 N/m ²) VELOCITY UP TO 18 ft/sec (5.5 m/sec)	PERMANENT	LANDLOK 450	\$9.00 - 14.00/yd ² \$10.77 - 16.75/m ²	2.5 ANCHORS/yd ² 3 ANCHORS/m ²
	SHEAR STRESS UP TO 12 lb/ft ² (576 N/m ²) VELOCITY UP TO 20 ft/sec (6.1 m/sec)	PERMANENT	LANDLOK 300	\$10.00 - 15.00/yd ² \$11.96 - 17.94/m ²	2.5 ANCHORS/yd ² 3 ANCHORS/m ²
BANKS ⁴	WAVE ACTION < 1 ft (30 cm)	PERMANENT	LANDLOK 1051	\$10.00 - 15.00/yd ² \$11.96 - 17.94/m ²	2.5 ANCHORS/yd ² 3 ANCHORS/m ²

NOTES: 1. Installed cost estimates range from large to small projects according to material quantity. The estimates include material, seed, labor and equipment. Note that costs vary greatly in different regions of the country. 2. For slopes steeper than 1H:1V, please see our Pyramat® HPTRM product brochure. 3. Values shown are short-term fully vegetated maximums. For channels with a shear stress greater than 12 lb/ft² (576 N/m²) and velocity greater than 20 ft/sec (6.1 m/sec), please see our Pyramat HPTRM product brochure. 4. For wave action greater than 1 ft (30 cm), please see our Pyramat HPTRM product brochure. 5. For anchor size and style, please see our TRM Installation Guidelines.

KEY PHYSICAL PROPERTIES OF LANDLOK® TURF REINFORCEMENT MATS

- **Tensile Strength:** High-strength and low-strain minimizes seed, root damage and material under heavy loads.
- **Flexibility:** Greater flexibility allows our TRMs to conform and maintain intimate contact with the prepared grade, increasing the ease of successful installation.
- **Seedling Emergence:** Landlok TRMs, now with X3® fiber technology, offer 40% more fiber surface area to capture the critical sediment and moisture needed to increase seed germination within the first 21 days.
- **UV Resistance:** All Landlok TRM components are constructed with the top-tested UV stabilizers, such as carbon black and hindered amine light stabilizers (HALS).

SEVEN STEPS FOR SUCCESSFUL TRM SELECTIONS*

1	SELECT APPLICATIONS	2	DETERMINE FUNCTIONAL LONGEVITY	3	ANTICIPATE CLIMATE (ARID, SEMI-ARID OR TEMPERATE)	4	UNDERSTAND TRADITIONAL SOLUTION	5	PREDICT NON-HYDRAULIC STRESSES (MAINTENANCE STRESSES)	6	KNOW VEGETATION TYPE	7	CALCULATE HYDRAULIC STRESSES
----------	----------------------------	----------	---------------------------------------	----------	---	----------	--	----------	---	----------	-----------------------------	----------	-------------------------------------

*See Propex Engineering Bulletin or EC-DESIGN® software for more information.

LANDLOK® TURF REINFORCEMENT MAT PROPERTY TABLE¹ ENGLISH & METRIC UNITS

PHYSICAL	PROPERTY	TEST METHOD	VALUE ²	LANDLOK® 450	LANDLOK® 1051	LANDLOK® 300
	MASS PER UNIT AREA	ASTM D-6566	MARV	10.0 oz/yd ² 340 g/m ²	14 oz/yd ² 475 g/m ²	8.3 oz/yd ² 281 g/m ²
	THICKNESS	ASTM D-6525	MARV	0.4 in 10.1 mm	0.4 in 10.1 mm	0.3 in 7.6 mm
	LIGHT PENETRATION	ASTM D-6567	TYPICAL	20%	5%	50%
MECHANICAL	COLOR	VISUAL	—	GREEN, TAN	TAN	GREEN, TAN
	TENSILE STRENGTH	ASTM D-6818	MARV	400 x 300 lb/ft 5.8 x 4.3 kN/m	300 x 225 lb/ft 4.3 x 3.2 kN/m	2400 x 2000 lb/ft 35.0 x 29.2 kN/m
	TENSILE ELONGATION	ASTM D-6818	MAXIMUM	50%	85%	50%
	RESILIENCY	ASTM D-6524	MARV	90%	80%	75%
ENDURANCE	FLEXIBILITY	ASTM D-6575	TYPICAL	0.026 in-lbs 30000 mg-cm	0.022 in-lbs 25000 mg-cm	0.195 in-lbs 225000 mg-cm
	FUNCTIONAL LONGEVITY	OBSERVED	TYPICAL	PERMANENT	PERMANENT	PERMANENT
	UV RESISTANCE	ASTM D-4355	MINIMUM	80% @ 1000 HOURS	80% @ 1000 HOURS	90% @ 3000 HOURS
	SEEDLING EMERGENCE ³	ECTC DRAFT METHOD #4	TYPICAL	409%	220%	296%
PACKAGING	ROLL WIDTH	MEASURED	TYPICAL	6.5 ft 2.0 m	6.5 ft 2.0 m	8.5 ft 2.6 m
	ROLL LENGTH	MEASURED	TYPICAL	138.5 ft 42.2 m	138.5 ft 42.2 m	106 ft 32.3 m
	ROLL WEIGHT	CALCULATED	TYPICAL	75 lb 34 kg	101 lb 46 kg	51 lb 23 kg
	ROLL AREA	MEASURED	TYPICAL	100 yd ² 84 m ²	100 yd ² 84 m ²	100 yd ² 84 m ²

NOTES: 1. The listed property values are effective 06/2009 and are subject to change without notice. 2. MARV indicates Minimum Average Roll Value calculated as the typical minus two standard deviations. Statistically, it yields a 97.7% degree of confidence that any sample taken during quality assurance testing will exceed the reported value. 3. Calculated as percent increase in average plant biomass with tall fescue grass seed in sand 14 days after seeding versus traditional monofilament TRMs and HPTIRMs.

LANDLOK® TURF REINFORCEMENT MAT PERFORMANCE VALUES ENGLISH & METRIC UNITS

MATERIAL	FUNCTIONAL LONGEVITY	SHORT-TERM MAXIMUM SHEAR STRESS AND VELOCITY						MANNING'S "n"		
		VEGETATED ^{4, 7}		PARTIALLY ⁵		UNVEGETATED ⁶		0"-6"	6"-12"	12"-24"
LANDLOK® 450	PERMANENT	10 lb/ft ² 479 N/m ²	18 ft/sec 5.5 m/sec	8 lb/ft ² 383 N/m ²	15 ft/sec 4.6 m/sec	5 lb/ft ² 239 N/m ²	12 ft/sec 3.7 m/sec	0.035	0.025	0.021
LANDLOK 1051	PERMANENT	10 lb/ft ² 479 N/m ²	18 ft/sec 5.5 m/sec	n/a	n/a	5 lb/ft ² 239 N/m ²	12 ft/sec 3.7 m/sec	0.036	0.026	0.020
LANDLOK 300	PERMANENT	12 lb/ft ² 576 N/m ²	20 ft/sec 6.1 m/sec	—	—	—	—	0.030	0.028	0.018

NOTES: 4. Maximum permissible shear stress has been obtained through fully vegetated (70% to 100% density) testing programs featuring specific soil types, vegetation classes, flow conditions and failure criteria. These conditions may not be relevant to every project nor are they replicated by other manufacturers. Please contact Propex for further information. 5. Maximum permissible shear stress has been obtained through partially vegetated (30% to 70% density) testing programs featuring specific soil types, vegetation classes, flow conditions and failure criteria. These conditions may not be relevant to every project nor are they replicated by other manufacturers. Please contact Propex for further information. 6. Maximum permissible shear stress has been obtained through unvegetated (0% to 30% density) testing programs featuring specific soil types, vegetation classes, flow conditions and failure criteria. These conditions may not be relevant to every project nor are they replicated by other manufacturers. Please contact Propex for further information. 7. Maximum permissible shear stress achieved after only 14 weeks of vegetative establishment versus the industry standard of two full growing seasons.

For downloadable documents like construction specifications, installation guidelines, case studies and other technical information, please visit our web site at geotextile.com. These documents are available in easy-to-use Microsoft® Word format.



Propex Operating Company, LLC PH: 423 899 0444
6025 Lee Highway, Suite 425 PH: 800 621 1273
PO Box 22788 FAX: 423 899 7619
Chattanooga, TN 37422 www.geotextile.com

Geotex®, Landlok®, Pyramat®, X3®, SuperGro®, Petromat® and Petrotac® are registered trademarks of Propex Operating Company, LLC.

THIS PUBLICATION SHOULD NOT BE CONSTRUED AS ENGINEERING ADVICE. WHILE INFORMATION CONTAINED IN THIS PUBLICATION IS ACCURATE TO THE BEST OF OUR KNOWLEDGE, PROPEX DOES NOT WARRANT ITS ACCURACY OR COMPLETENESS. THE ULTIMATE CUSTOMER AND USER OF THE PRODUCTS SHOULD ASSUME SOLE RESPONSIBILITY FOR THE FINAL DETERMINATION OF THE SUITABILITY OF THE INFORMATION AND THE PRODUCTS FOR THE CONTEMPLATED AND ACTUAL USE. THE ONLY WARRANTY MADE BY PROPEX FOR ITS PRODUCTS IS SET FORTH IN OUR PRODUCT DATA SHEETS FOR THE PRODUCT, OR SUCH OTHER WRITTEN WARRANTY AS MAY BE AGREED BY PROPEX AND INDIVIDUAL CUSTOMERS. **PROPEX SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ARISING FROM PROVISION OF SAMPLES, A COURSE OF DEALING OR USAGE OF TRADE.**

References

- Field, R., A. N. Tafuri, et al. (2004). The Use of Best Management Practices (BMPs) in Urban Watersheds. Lancaster, PA, DEStech Publications, Inc.
- Liebl, D. (2006). Storm Water Detention Ponds Site Safety & Design, University of Wisconsin-Extension and Wisconsin Department of Natural Resource.
- MDE (2000). Maryland Stormwater Design Manual: Volumes 1 &2, prepared by Maryland Dept of the Environment (MDE) and Center for Watershed Protection. Annapolis, MD.
- USEPA (1993). Guidance Specifying Management Measures for Sources of Nonpoint Pollution in Coastal Waters. EPA 840-B-92-002B. U.S. Environmental Protection Agency, Washington, DC.
- USEPA (2005). National Management Measures to Control Nonpoint Source Pollution from Urban Areas. Washington, D.C., U.S. Environmental Protection Agency.
- USEPA (2007). National Management Measures to Control Nonpoint Source Pollution from Hydromodification. Washington, D.C., U.S. Environmental Protection Agency.

Watershed Based Plan for Reduction of Nonpoint Source Pollution in Wailupe Stream Watershed

Implementation Strategy Report

Draft

June 2010

Prepared for:

Malāma Maunalua
P.O. Box 240421
Honolulu, HI 96824

Prepared by:

Sustainable Resources Group Intn'l, Inc.
111 Hekili Street, Ste A373
Kailua, HI 96734

This page intentionally left blank.

Table of Contents

Table of Contents	i
List of Tables	ii
1 Introduction.....	1
2 Resources Required for Implementation	1
2.1 Technical Resources	1
2.2 Financial Resources	2
3 Implementation Priority	5
4 Responsible Entities.....	7
4.1 Regulating Point Source Pollution.....	8
4.2 Managing NPS Pollution	9
4.2.1 Federal and State Programs.....	9
4.2.2 Voluntary Initiatives	10
4.3 Implementing Management Practices	13
5 Measurable Milestones	13
5.1 Program Implementation.....	14
5.2 Pollution Reduction Targets.....	16
6 Adaptive Management.....	16

List of Tables

Table 1. Costs Associated with Recommended Management Practices	4
Table 2. Relative Implementation Priorities	6
Table 3. Priority Management Practices by Management Unit	6
Table 4. Agencies with Responsibilities Related to Controlling Polluted Runoff and Maintaining Water Quality	10
Table 5. Entities Responsible for Implementing and Maintaining Management Practices	13
Table 6. Implementation Timeframe for Management Measures.....	14
Table 7. Management Practice Subtasks.....	15

1 Introduction

The goal of the *Wailupe Watershed Based Plan* (WBP) is to identify management objectives and pollutant control strategies to reduce the generation and discharge of non point source (NPS) pollutants into the receiving waters of Wailupe Stream and Maunalua Bay based on an assessment of the watershed condition. The *Pollution Control Strategies Report* identifies management units for Wailupe Watershed and associated management practices to achieve this goal. This *Implementation Strategy Report* provides details to facilitate the implementation of the recommended management practices. In particular, this report provides:

- An estimate of the technical and financial resources required to implement the recommended pollution control measures.
- A prioritization for implementing the recommended pollution control measures.
- Identification of the entity/entities responsible for implementing specific plan recommendations.
- Measurable milestones to aid in determining if pollution control measures are being implemented and if load reductions and load targets are being achieved.
- An adaptive management mechanism to address watershed plan recommendations should the load reductions and load targets not be achieved.

A comprehensive approach to addressing the larger set of pollution control strategies should be considered when determining the reduction potential of each management practice. Each management practice will contribute to the overall success, and in combination, implemented practices will result in cumulative net reductions of pollutant runoff loads from the watershed. Identifying key implementation strategies will ensure that the management measures and practices identified in this WBP are developed and implemented with a solid foundation and oversight aimed ultimately at measureable reductions in pollutant loads.

2 Resources Required for Implementation

A watershed management approach to NPS pollution control requires systematic steps. The implementation of specific management practices is part of this process and follows the identification of pollutant sources, selection of the appropriate practice to reduce the target NPS pollutant, identification of the locations for installation, and acceptance of responsibility by the sponsoring entity. The resources required to implement a management practice are a function of the complexity of the design, the site conditions for its installation, and the regulatory and land owner requirements and ordinances. The management practices identified in this report vary in complexity and the resources to implement them range from minor to significant.

2.1 Technical Resources

Technical resources necessary to implement management practices are a function of the complexity of the engineering design, land ownership issues, permit requirements, preparation of biddable construction plans and drawings, and development of a post installation Operation Monitoring and Maintenance Plan.