

Red Hill Well Weekly Operations Report

0000, 15 JUNE 2025 – 2359, 21 JUNE 2025


Execution Summary: Over the period of this report, daily pumping operations averaged 1.69 million gallons per day. Influent Flow Meter in pump room is out for repair from 12/01/23. Flow meter reading taken from blue flow meter outside of Adit 3 from 12/13/23. Flow reduction started on 04/30/25.

Pumps were turned on 0900 06/16/2025 and were turned off at 0900 06/18/2025. The pumps turned on again at 0900 06/20/2025 and turned off again 0900 06/21/2025.

No turbulence noted inside boom and no sheen observed in Halawa stream. All other readings were within normal range. Ten of 10 inline analyzers are operational for the monitoring of influent/effluent along with benchtop analyzers IAW RHSRMP.

1. Production Data

Weekly Volume (MG)
11.80
Daily Average (MGD)
1.69
Total Pumped to Date (MG)
2390.63

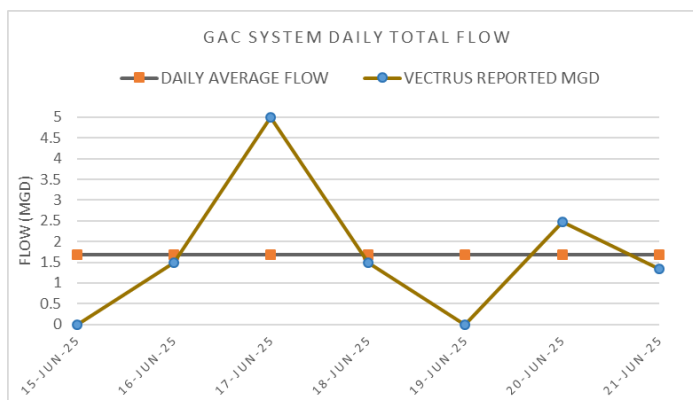

2. GAC Operations

	In Operation During Period of Report	Date Since Last Operation	Date Since Media Change	Estimate Date of Media Change
Train 1	N/A	Restart on 20 JUN 2025	19 FEB 2025	AUG - SEPT 2025
Train 2	N/A	Restart on 20 JUN 2025	04 MAR 2025	AUG - SEPT 2025
Train 3	N/A	Restart on 20 JUN 2025	15 MAR 2025	AUG - SEPT 2025
Train 4	N/A	Restart on 28 MAY 2025	26 MAR 2025	AUG - SEPT 2025

3. Process Control Sampling

Influent Parameter ²	Number of Samples	Number of Detectable Samples	Highest Level Detected ³	Units ⁴
Total Petroleum Hydrocarbons as Gasoline	42	0	ND	ppm
Total Petroleum Hydrocarbons as Diesel	42	0	ND	ppm

Lead Tank Effluent Parameter ⁵	Number of Samples	Number of Detectable Samples	Highest Level Detected ³	Units ⁴
Total Petroleum Hydrocarbons as Gasoline	42	0	ND	ppm
Total Petroleum Hydrocarbons as Diesel	42	0	ND	ppm

Lag Tank Effluent Parameter ⁵	Number of Samples	HI DOH Effluent Limitations	Highest Level Detected ³	Units ⁴
Total Petroleum Hydrocarbons as Gasoline	42	0.30	ND	ppm
Total Petroleum Hydrocarbons as Diesel	42	0.40	ND	ppm

Notes:

1. Train 4 cycled for two hours to prevent stagnation of water inside GAC system.

2. Sampling taken every four hours starting at 0300; total of six samples per day

3. Minimum detection limit for Portable Analyzers: TPH-d at 0.1 ppm, and TPH-g at 0.2 ppm

4. One part per million (ppm) is equivalent to 1 milligram per liter (mg/L)

5. Sampling taken from one active train every four hours, in rotation, starting at 0300, after both the lead and the lag tanks; total of twelve samples per day